

BC817DPN-AU

Electrical Characteristics Q1 (T_A=25°C unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNITS |
|---|----------------------|--|------|------|------|-------|
| OFF Characteristics | | | | | | |
| Collector-Emitter Breakdown Voltage | BV _{CEO} | I _C = 10mA, I _B = 0A | 45 | - | - | V |
| Collector-Base Breakdown Voltage | BV _{CBO} | I _C = 0.01mA, I _E = 0A | 50 | - | - | V |
| Emitter-Base Breakdown Voltage | BV _{EBO} | I _E = 0.01mA, I _C = 0A | 5 | - | - | V |
| Collector Cutoff Current | I _{CBO} | V _{CB} = 20V, I _E = 0A | - | - | 100 | nA |
| Emitter Cutoff Current | I _{EBO} | V _{EB} = 5V, I _C = 0A | - | - | 100 | nA |
| ON characteristics | | | | | | |
| DC Current Gain (Note1) | h _{FE} | V _{CE} = 1V, I _C = 0.1A | 100 | - | 600 | - |
| | | V _{CE} = 1V, I _C = 0.5A | 40 | - | - | |
| Collector-Emitter Saturation Voltage (Note1) | V _{CE(SAT)} | I _C = 0.5A, I _B = 50mA | - | - | 0.7 | V |
| Base-Emitter Turn-on Voltage (Note1) | V _{BE(ON)} | V _{CE} = 1V, I _C = 0.5A | - | - | 1.2 | V |
| Transition Frequency | f _T | V _{CE} = 5V, I _C = 0.01A F=100MHz | 100 | - | - | MHz |
| Collector Output Capacitance | C _{OB} | V _{CB} = 10V, I _E = 0A, F=1MHz | - | 7 | - | pF |

Note: 1. Pulse width ≤ 300us, Duty cycle ≤ 2%

BC817DPN-AU

Electrical Characteristics Q2 (T_A=25°C unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNITS |
|---|----------------------|--|------|------|------|-------|
| OFF Characteristics | | | | | | |
| Collector-Emitter Breakdown Voltage | BV _{CEO} | I _C = -10mA, I _B = 0A | -45 | - | - | V |
| Collector-Base Breakdown Voltage | BV _{CB0} | I _C = -0.01mA, I _E = 0A | -50 | - | - | V |
| Emitter-Base Breakdown Voltage | BV _{EBO} | I _E = -0.01mA, I _C = 0A | -5 | - | - | V |
| Collector Cutoff Current | I _{CB0} | V _{CB} = -20V, I _E = 0A | - | - | -100 | nA |
| Emitter Cutoff Current | I _{EBO} | V _{EB} = -4V, I _C = 0A | - | - | -100 | nA |
| ON characteristics | | | | | | |
| DC Current Gain (Note1) | h _{FE} | V _{CE} = -1V, I _C = -0.1A | 100 | - | 600 | - |
| | | V _{CE} = -1V, I _C = -0.5A | 40 | - | - | |
| Collector-Emitter Saturation Voltage (Note1) | V _{CE(SAT)} | I _C = -0.5A, I _B = -50mA | - | - | -0.7 | V |
| Base-Emitter Turn-on Voltage (Note1) | V _{BE(ON)} | V _{CE} = -1V, I _C = -0.5A | - | - | -1.2 | V |
| Transition Frequency | f _T | V _{CE} = -5V, I _C = -0.01A F=100MHz | 100 | - | - | MHz |
| Collector Output Capacitance | C _{OB} | V _{CB} = -10V, I _E = 0A, F=1MHz | - | 7 | - | pF |

Note: 1. Pulse width ≤ 300us, Duty cycle ≤ 2%

BC817DPN-AU

NPN TYPICAL CHARACTERISTIC CURVES

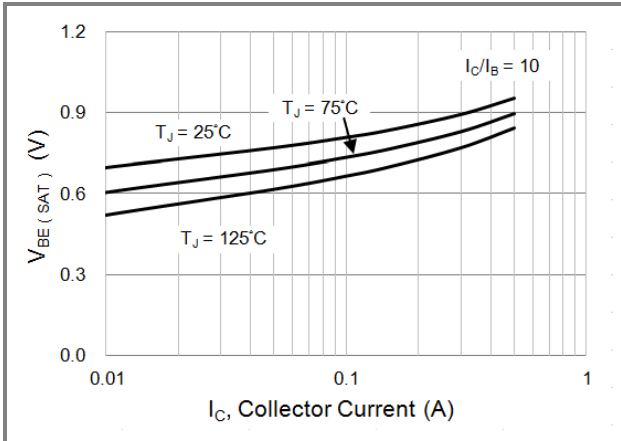


Fig.1 Typical Base-Emitter Saturation Voltage

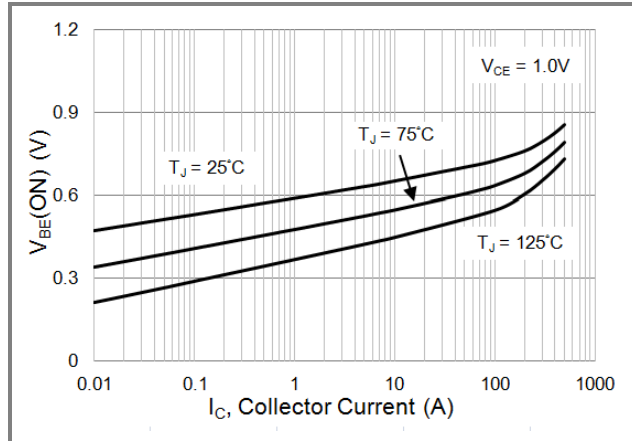


Fig.2 Typical Base-Emitter Turn ON Voltage

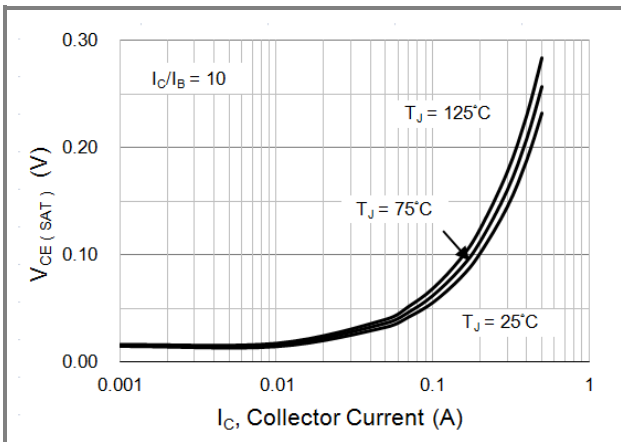


Fig.3 Typical Collector-Emitter Saturation

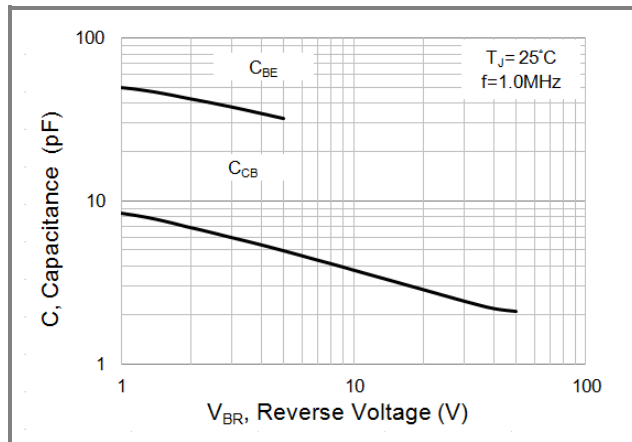


Fig.4 Typical Capacitance






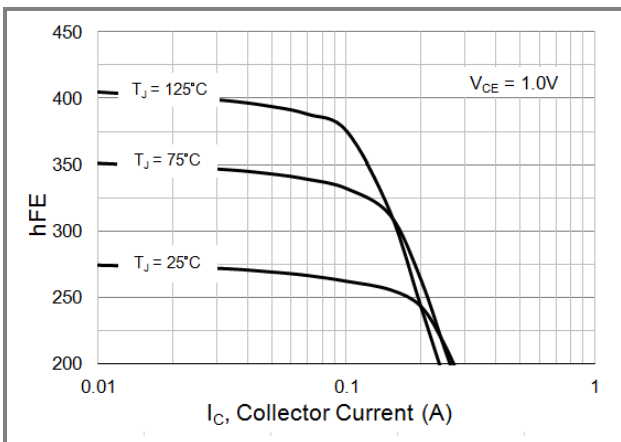


Fig.5 Typical DC Current Gain

BC817DPN-AU

PNP TYPICAL CHARACTERISTIC CURVES

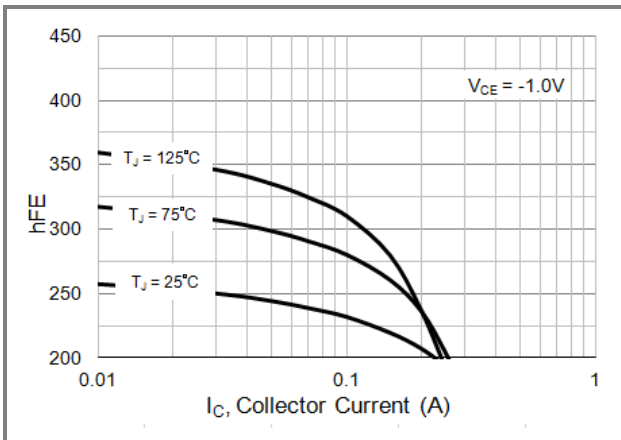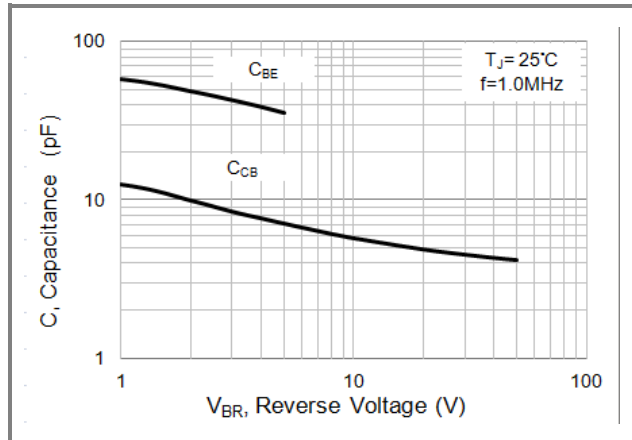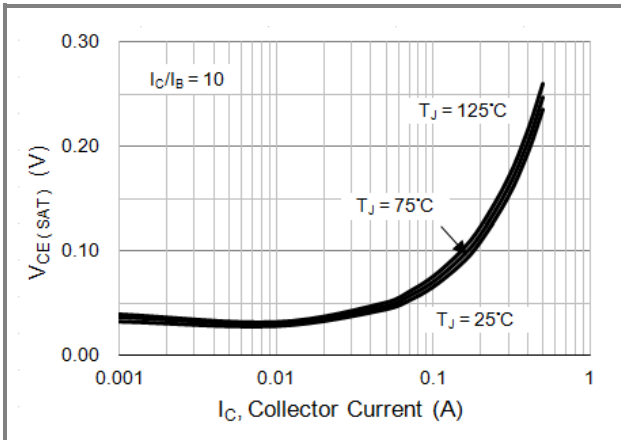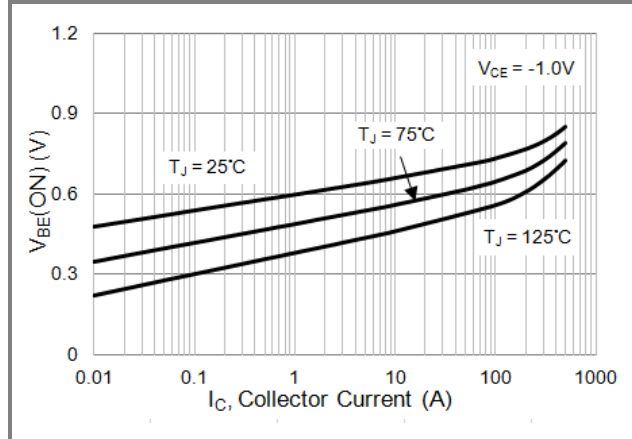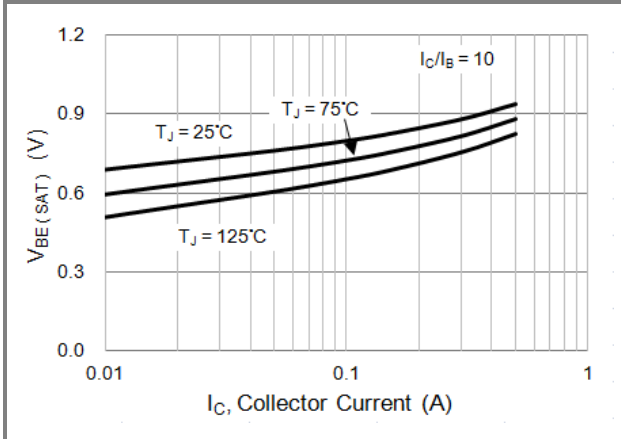


BC817DPN-AU

Product and Packing Information

| Part No. | Package Type | Packing Type | Marking |
|-------------|--------------|--------------------|---------|
| BC817DPN-AU | SOT-23 6L | 3K pcs / 7" reel | 8PN |
| BC817DPN-AU | SOT-23 6L | 10K pcs / 13" reel | 8PN |

Mounting Pad Layout

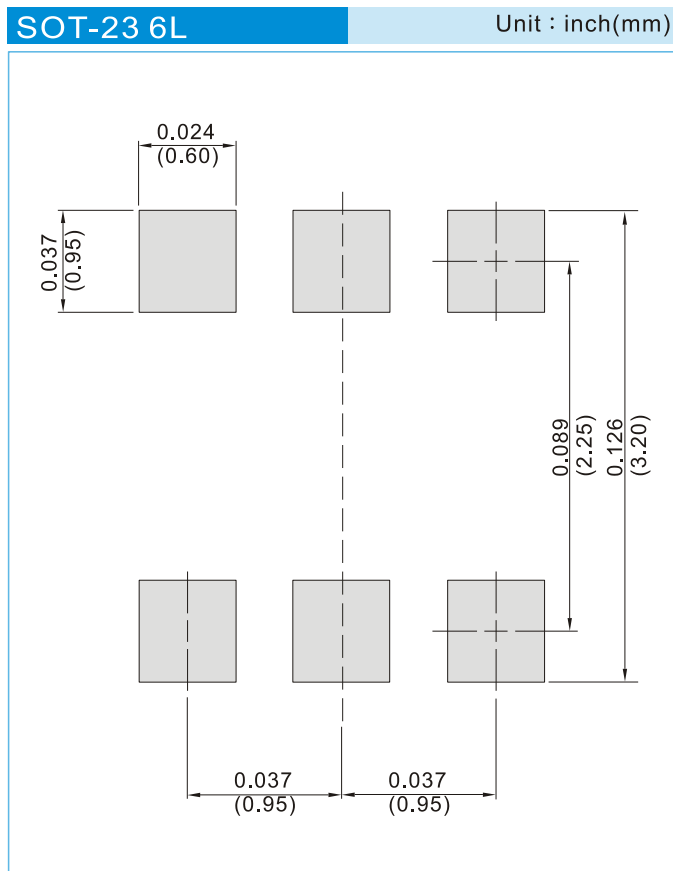

BC817DPN-AU

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.