

## **EXTREME LOW VF SCHOTTKY RECTIFIER**

Voltage 20-40 V Current 0.5 A

#### **Features**


- Ultra low forward voltage, low power loss
- Surface mount package
- Ultra thin profile package for space constrained utilization
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### **Applications**

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

#### **Mechanical Data**

- Case: Molded plastic, SOT-23
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084 grams

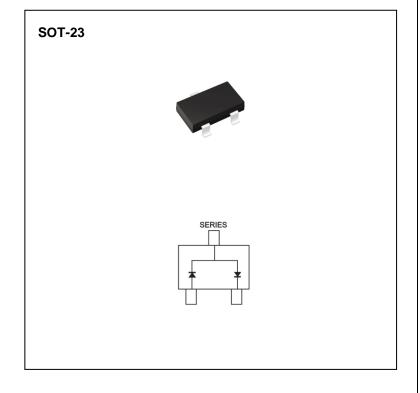

### **Maximum Ratings** (T<sub>A</sub> = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SBA0520SA	SBA0530SA	SBA0540SA	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V	
Maximum rms voltage	V <sub>RMS</sub>	14	21	28	V	
Maximum dc blocking voltage	$V_R$	20	30	40	V	
Maximum average forward rectified current	I <sub>F(AV)</sub>	0.5				
Peak forward surge current: 8.3ms single half sinewave Superimposed on rated load	I <sub>FSM</sub>	2				
To wise lith a great as sisten as	R <sub>θJA</sub> <sup>(1)</sup>	350			°C/W	
Typical thermal resistance	Rejc (2)	180				
Operating junction temperature range	TJ	-55 to +150				
Storage temperature range	T <sub>STG</sub>	-55 to +150				

### **Electrical Characteristics**


DADAMETER	OVMDO	TEST CONDITION		SBA0520SA		SBA0530SA		SBA0540SA		
PARAMETER	SYMBOL			TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	UNIT
		I <sub>F</sub> = 10mA		0.24	-	0.25	-	0.23	-	V
		I <sub>F</sub> = 100mA	T <sub>J</sub> =25 °C	0.32	-	0.33	-	0.35	-	
Forward voltage	VF	I <sub>F</sub> = 500mA		-	0.48	-	0.52	-	0.6	
		I <sub>F</sub> = 10mA	T <sub>J</sub> =125 °C	0.13	-	0.13	-	0.15	-	V
		I <sub>F</sub> = 100mA		0.23	-	0.24	-	0.29	-	
		V <sub>R</sub> = 10V	T <sub>J</sub> =25°C	4.6	-	4	-	1.3	-	μΑ
		V <sub>R</sub> = 20V		-	100	9	-	1.9	-	
		V <sub>R</sub> = 30V		-	-	-	100	3.1	-	
Reverse current	I <sub>R</sub> <sup>(3)</sup>	V <sub>R</sub> = 40V		_	-	-	-	-	50	
		V <sub>R</sub> = 20V		1.7	-	1.4	-	0.5	-	
		V <sub>R</sub> = 30V	T <sub>J</sub> =125 °C	-	-	3.5	-	0.8	-	mA
		V <sub>R</sub> = 40V		_	_	-	_	1.3	-	


Note: 1. Mounted on a FR4 PCB, single-sided copper, mini pad.


- 2. Mounted on a FR4 PCB, single-sided copper, with 100cm<sup>2</sup> copper pad area.
- $3. \ Short \ duration \ pulse \ test \ used \ to \ minimize \ self-heating \ effect.$





### **TYPICAL CHARACTERISTIC CURVES**

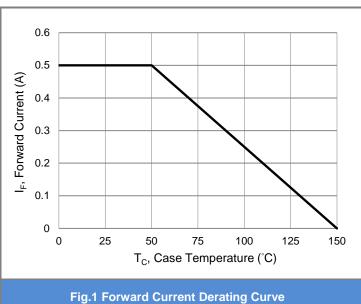


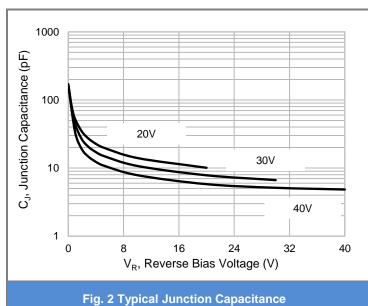

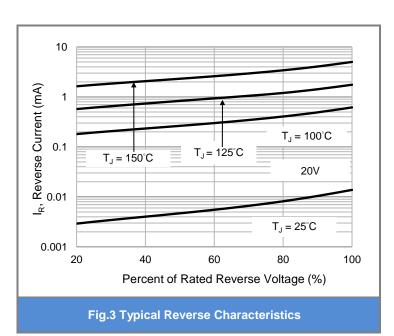

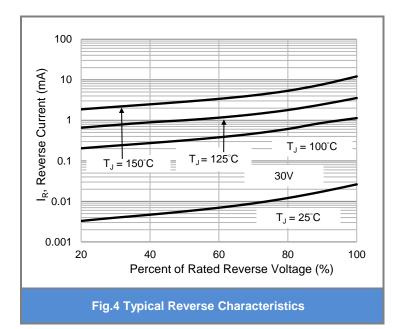


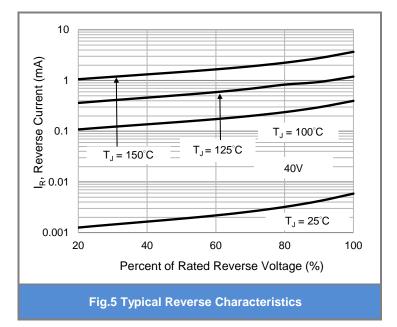

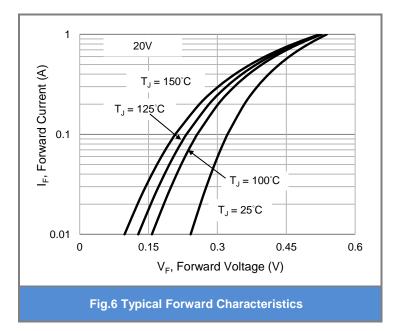



October 21,2025 SBA0520SA\_SERIES-REV.01 Page 2



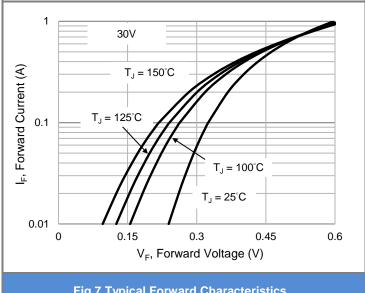



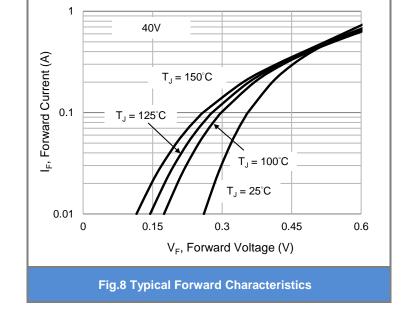

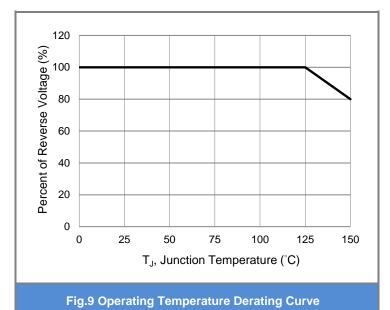





## **Product and Packing Information**

Part No.	Package Type	Packing Type	Marking
SBA0520SA	SOT-23	3K pcs / 7" reel	2SA
SBA0530SA	SOT-23	3K pcs / 7" reel	3SA
SBA0540SA	SOT-23	3K pcs / 7" reel	4SA

## **Packaging Information & Mounting Pad Layout**

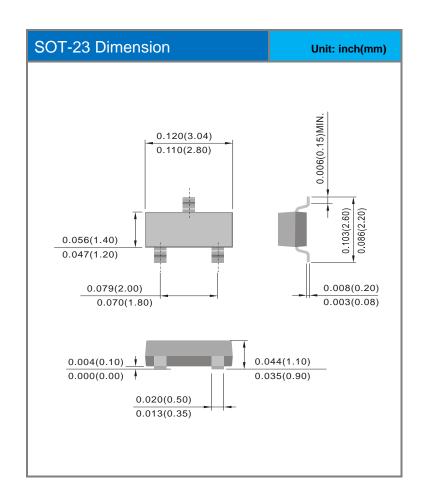

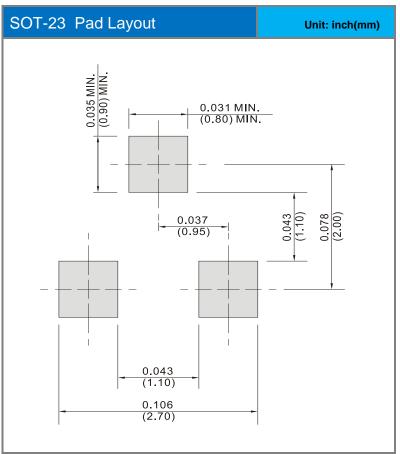



#### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.

<ul> <li>Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining</li> </ul>	•	Since Paniit uses I	lot number as the	e tracking base	please provide the le	ot number for tracking	when complaining
--	---	---------------------	-------------------	-----------------	-----------------------	------------------------	------------------