

### Surface Mount Ultra Low IR Schottky Barrier Rectifier

Voltage 60 V Current 2 A

### **Features**


- Low leakage current
- Ideal for automated placement
- Low power loss, high efficiency
- High surge current capability
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

#### **Mechanical Data**

• Case: SOD-123FL Package

• Terminals : Solderable per MIL-STD-750, Method 2026

• Approx. Weight: 0.0173 grams

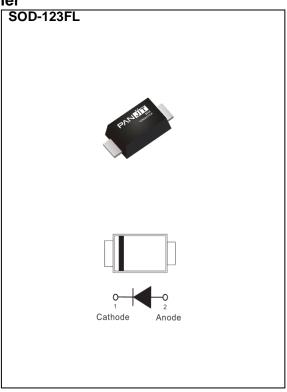

## Maximum Ratings and Thermal Characteristics (T<sub>A</sub> = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS	
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	60	V	
Maximum RMS Voltage	V <sub>RMS</sub>	42	V	
Maximum DC Blocking Voltage	V <sub>DC</sub>	60	V	
Maximum Average Forward Current	I <sub>F(AV)</sub>	2	Α	
Peak Forward Surge Current : 8.3 ms Single Half Sine- Wave Superimposed On Rated Load	I <sub>FSM</sub>	50	А	
Typical Junction Capacitance  Measured at 1 MHZ And Applied V <sub>R</sub> = 4 V	C₁	100	pF	
(Note 1)	$R_{\theta JA}$	200	°C/W	
Typical Thermal Resistance (Note 2)	R <sub>θJC</sub>	32		
Operating Junction Temperature Range	TJ	-55~175	°C	
Storage Temperature Range	T <sub>STG</sub>	-55~175	°C	



## **Electrical Characteristics** (T<sub>A</sub> = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Forward Voltage	VF	I <sub>F</sub> = 0.5 A, T <sub>J</sub> = 25 °C	-	0.54	-	V
		I <sub>F</sub> = 2 A, T <sub>J</sub> = 25 °C	-	-	0.75	
		I <sub>F</sub> = 0.5 A, T <sub>J</sub> = 125 °C	-	0.39	-	
		I <sub>F</sub> = 2 A, T <sub>J</sub> = 125 °C	-	0.53	-	
Reverse Current <sup>(Note 3)</sup>	I <sub>R</sub>	V <sub>R</sub> = 48 V, T <sub>J</sub> = 25 °C	-	0.05	ı	uA
		V <sub>R</sub> = 60 V, T <sub>J</sub> = 25 °C	-	1	3	
		V <sub>R</sub> = 60 V, T <sub>J</sub> = 125 °C	-	0.15	-	mA

#### NOTES:

- 1. Mounted with minimum recommended pad size, PC Board FR4.
- 2. Mounted on a FR4 PCB, single-sided copper, with 100cm<sup>2</sup> copper pad area.
- 3. Short duration pulse test used to minimize self-heating effect.

March 28,2025 MB2H60AL-AU-REV.03 Page 2



#### **TYPICAL CHARACTERISTIC CURVES**

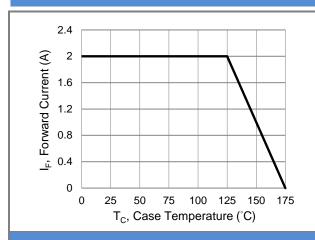


Fig.1 Forward Current Derating Curve

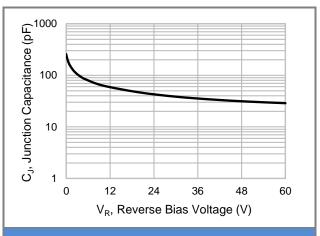


Fig.2 Typical Junction Capacitance

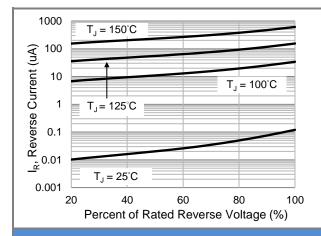


Fig.3 Typical Reverse Characteristics

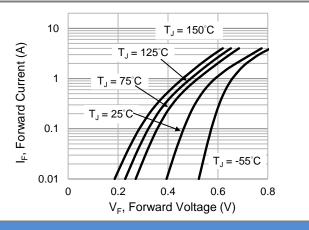


Fig.4 Typical Forward Characteristics

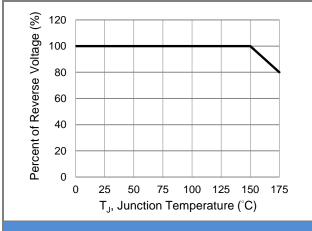



Fig.5 Operating Temperature Derating Curve




## **Product and Packing Information**

Part No.	Package Type	Packing Type	Marking
MB2H60AL-AU	SOD-123FL	3K / 7" Reel	9AL

## **Packaging Information & Mounting Pad Layout**

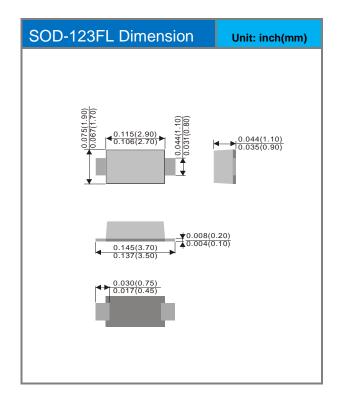

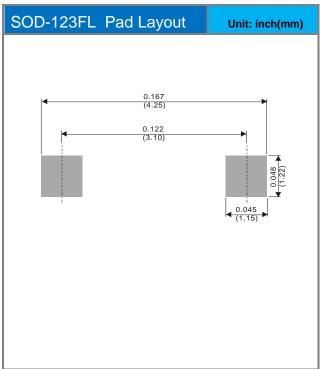



### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are
  responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no
  representation or warranty that such applications will be suitable for the specified use without further testing or
  modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

March 28,2025 MB2H60AL-AU-REV.03 Page 5