



# MMDT2227A

## COMPLEMENTARY NPN / PNP SMALL SIGNAL SURFACE MOUNT TRANSISTOR

**VOLTAGE** 60 Volt    **POWER** 225 mW

**SOT-363**    Unit : inch(mm)

### FEATURES

- Complementary Pair
- Epitaxial Planar Die Construction
- Ultra-Small Surface Mount Package
- One MMDT2222A-Type NPN  
One MMDT2907A-Type PNP
- Ideal for Low Power Amplification and Switching
- Also Available in Lead Free Version
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

### MECHANICAL DATA

- Case: SOT-363
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx Weight: 0.0002 ounces, 0.006 grams
- Device Marking : S0A





Fig.55(TOP VIEW)

### Maximum Ratings MMDT2222A Section @ $T_A=25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	MMDT2222A	Units
Collector-Base Voltage	$V_{CBO}$	75	V
Collector-Emitter Voltage	$V_{CEO}$	40	V
Emitter-Base Voltage	$V_{EBO}$	6.0	V
Collector Current-Continuous	$I_C$	600	mA
Power Dissipation	$P_d$	225	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	625	$^\circ\text{C}/\text{W}$
Operation and Storage and Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$

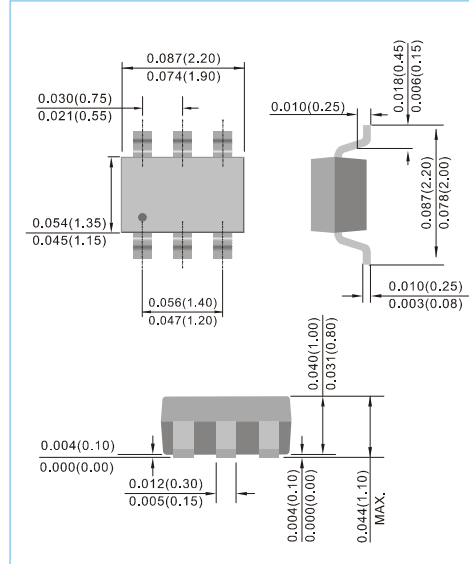

# MMDT2227A

## Maximum Ratings MMDT2907A Section @ $T_A=25^{\circ}\text{C}$ unless otherwise specified

Characteristic	Symbol	MMDT2907A	Units
Collector-Base Voltage	$V_{CBO}$	-60	V
Collector-Emitter Voltage	$V_{CEO}$	-60	V
Emitter-Base Voltage	$V_{EBO}$	-5.0	V
Collector Current-Continuous	$I_C$	-600	mA
Power Dissipation	$P_d$	200	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	625	$^{\circ}\text{C/W}$
Operation and Storage and Temperature Range	$T_J, T_{STG}$	-55 to +150	$^{\circ}\text{C}$



# MMDT227A

## Electrical Characteristics, MMDT22A Section @ $T_A=25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min.	Max.	Unit	Test Condition
OFF CHARACTERISTICS(Note 2)					
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	75	-	V	$I_C=-10\mu\text{A}, I_E=0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	40	-	V	$I_C=10\text{mA}, I_B=0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6.0	-	V	$I_E=-10\mu\text{A}, I_C=0$
Collector Cutoff Current	$I_{CBO}$	-	10	nA $\mu\text{A}$	$V_{CB}=60\text{V}, I_E=0$ $V_{CB}=60\text{V}, I_E=0, T_A=150^\circ\text{C}$
Collector Cutoff Current	$I_{CEX}$	-	10	nA	$V_{CE}=60\text{V}, V_{EB(OFF)}=3.0\text{V}$
Emitter Cutoff Current	$I_{EBO}$	-	100	nA	$V_{EB}=3.0\text{V}, I_C=0$
Base Cutoff Current	$I_{BL}$	-	20	nA	$V_{CE}=60\text{V}, V_{EB(OFF)}=3.0\text{V}$
ON CHARACTERISTICS(Note 2)					
DC Current Gain	$h_{FE}$	35 50 75 100 40 50 50	- - - 300 - - -	-	$I_C=100\mu\text{A}, V_{CE}=10\text{V}$ $I_C=1.0\text{mA}, V_{CE}=10\text{V}$ $I_C=10\text{mA}, V_{CE}=10\text{V}$ $I_C=150\text{mA}, V_{CE}=10\text{V}$ $I_C=500\text{mA}, V_{CE}=10\text{V}$ $I_C=10\text{mA}, V_{CE}=10\text{V}, T_A=-55^\circ\text{C}$ $I_C=150\text{mA}, V_{CE}=1.0\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	- -	0.3 1.0	V	$I_C=150\text{mA}, I_B=15\text{mA}$ $I_C=500\text{mA}, I_B=50\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	0.6 -	1.2 2.0	V	$I_C=150\text{mA}, I_B=15\text{mA}$ $I_C=500\text{mA}, I_B=50\text{mA}$
SMALL SIGNAL CHARACTERISTICS					
Output Capacitance	$C_{obo}$	-	8	pF	$V_{CB}=10\text{V}, f=1.0\text{MHz}, I_E=0$
Input Capacitance	$C_{ibo}$	-	25	pF	$V_{EB}=0.5\text{V}, f=1.0\text{MHz}, I_C=0$
Current Gain-Bandwidth Product	$f_T$	300	-	MHz	$V_{CE}=20\text{V}, I_C=20\text{mA}, f=100\text{MHz}$
Noise Figure	NF	-	4.0	dB	$V_{CE}=10\text{V}, I_C=100\mu\text{A}, R_s=1.0\text{k}\Omega, f=1.0\text{KHz}$
SWITCHING CHARACTERISTICS					
Delay Time	$t_d$	-	10	ns	$V_{CC}=30\text{V}, I_C=150\text{mA}, V_{BE(OFF)}=-0.5\text{V}, I_{B1}=15\text{mA}$
Rise Time	$t_r$	-	25	ns	



# MMDT2227A

## Electrical Characteristics, MMDT2907A Section @ $T_A=25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min.	Max.	Unit	Test Condition
OFF CHARACTERISTICS(Note 2)					
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-60	-	V	$I_C=-10\mu\text{A}, I_E=0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-60	-	V	$I_C=-10\text{mA}, I_B=0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5.0	-	V	$I_E=-10\mu\text{A}, I_C=0$
Collector Cutoff Current	$I_{CBO}$	-	-10	nA $\mu\text{A}$	$V_{CB}=-50\text{V}, I_E=0$ $V_{CB}=-50\text{V}, I_E=0, T_A=125^\circ\text{C}$
Collector Cutoff Current	$I_{CEX}$	-	-50	nA	$V_{CE}=-30\text{V}, V_{EB(OFF)}=-0.5\text{V}$
Base Cutoff Current	$I_{BL}$	-	-50	nA	$V_{CE}=-30\text{V}, V_{EB(OFF)}=-0.5\text{V}$
ON CHARACTERISTICS(Note 2)					
DC Current Gain	$h_{FE}$	75 100 100 100 50	- - - 300 -	-	$I_C=-100\mu\text{A}, V_{CE}=-10\text{V}$ $I_C=-1.0\text{mA}, V_{CE}=-10\text{V}$ $I_C=-10\text{mA}, V_{CE}=-10\text{V}$ $I_C=-150\text{mA}, V_{CE}=-10\text{V}$ $I_C=-500\text{mA}, V_{CE}=-10\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	-	-0.4 -1.6	V	$I_C=-150\text{mA}, I_B=-15\text{mA}$ $I_C=-500\text{mA}, I_B=-50\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	-	-1.3 -2.6	V	$I_C=-150\text{mA}, I_B=-15\text{mA}$ $I_C=-500\text{mA}, I_B=-50\text{mA}$
SMALL SIGNAL CHARACTERISTICS					
Output Capacitance	$C_{obo}$	-	8	pF	$V_{CB}=-10\text{V}, f=1.0\text{MHz}, I_E=0$
Input Capacitance	$C_{ibo}$	-	30	pF	$V_{EB}=-2.0\text{V}, f=1.0\text{MHz}, I_C=0$
Current Gain-Bandwidth Product	$f_T$	200	-	MHz	$V_{CE}=-20\text{V}, I_C=50\text{mA}, f=100\text{MHz}$
SWITCHING CHARACTERISTICS					
Turn-On Time	$t_{on}$	-	45	ns	$I_C=-150\text{mA}, V_{CC}=-30\text{V}, I_{B1}=-15\text{mA}$
Delay Time	$t_d$	-	10	ns	$V_{CC}=-30\text{V}, I_C=-150\text{mA}, I_{B1}=-15\text{mA}$
Rise Time	$t_r$	-	40	ns	



# MMDT2227A

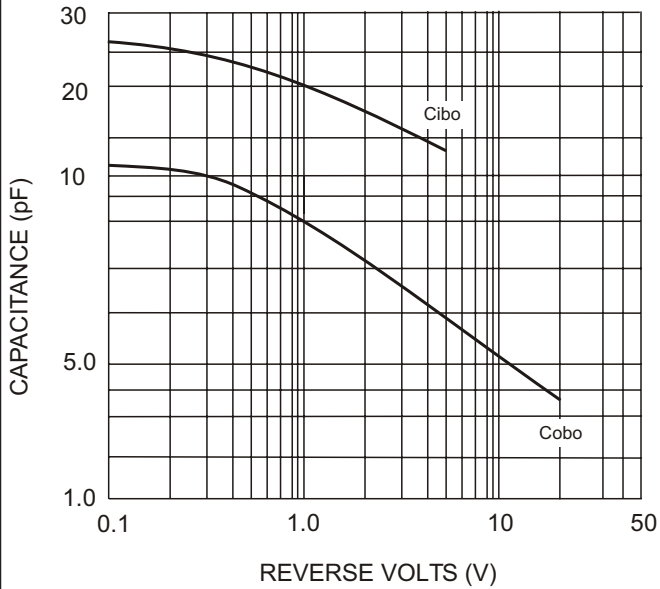


Fig. 1 (2222A) Typical Capacitance

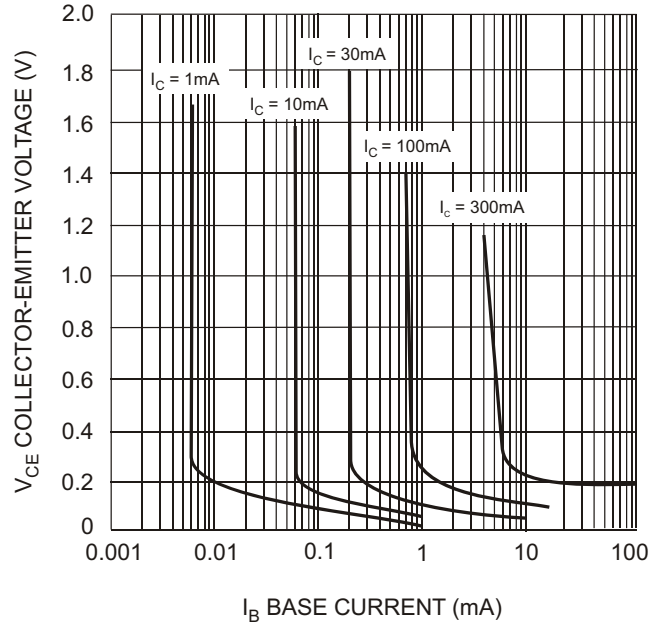


Fig. 2 (2222A) Typical Collector Saturation Region

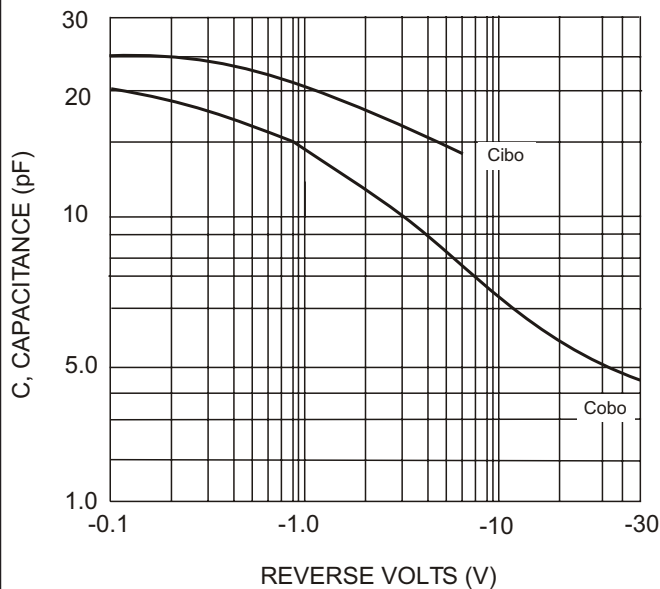


Fig. 3 (2907A) Typical Capacitance


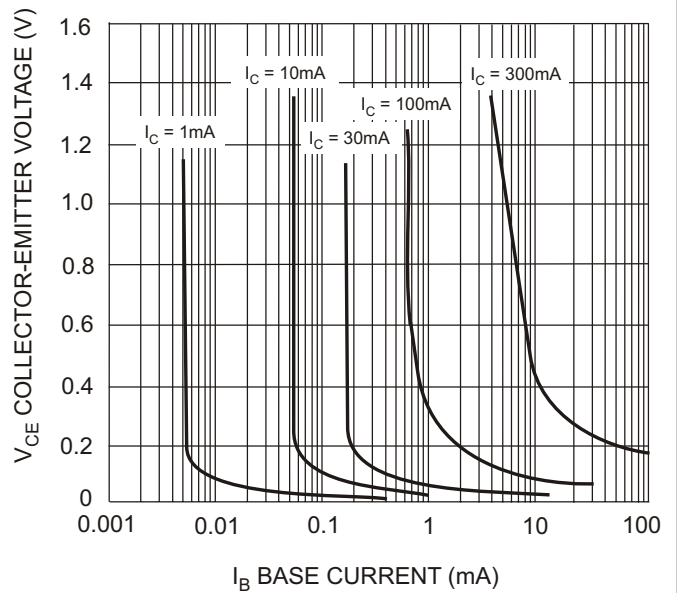


Fig. 4 (2907A) Typical Collector Saturation Region



# MMDT2227A

## MOUNTING PAD LAYOUT

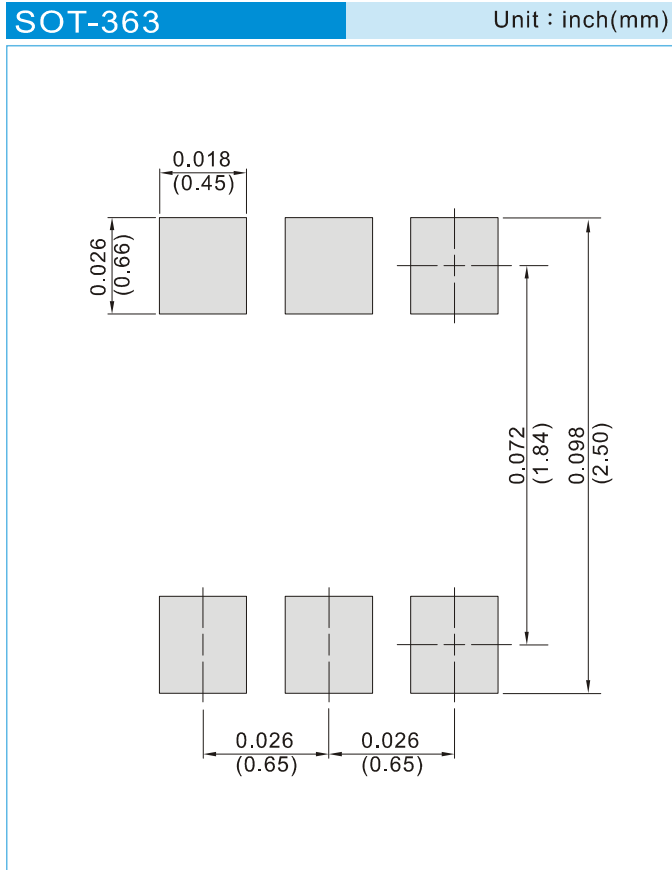

## ORDER INFORMATION

- Packing information
  - T/R - 10K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel



# MMDT2227A


## Part No\_packing code\_Version

MMDT2227A\_R1\_00001

MMDT2227A\_R2\_00001

For example :

**RB500V-40\_R2\_00001**

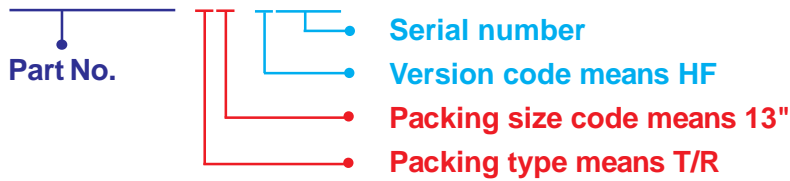

Packing Code <b>XX</b>				Version Code <b>XXXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	<b>A</b>	N/A	<b>0</b>	<b>HF</b>	<b>0</b>	serial number
Tape and Reel (T/R)	<b>R</b>	7"	<b>1</b>	<b>RoHS</b>	<b>1</b>	serial number
Bulk Packing (B/P)	<b>B</b>	13"	<b>2</b>			
Tube Packing (T/P)	<b>T</b>	26mm	<b>X</b>			
Tape and Reel (Right Oriented) (TRR)	<b>S</b>	52mm	<b>Y</b>			
Tape and Reel (Left Oriented) (TRL)	<b>L</b>	PANASERT T/B CATHODE UP (PBCU)	<b>U</b>			
FORMING	<b>F</b>	PANASERT T/B CATHODE DOWN (PBCD)	<b>D</b>			



## MMDT2227A

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.