

P6SMB6.8A-AU ~ P6SMB250CA-AU Series

Surface Mount Transient Voltage Suppressor

Voltage

6.8~250 V

Power

600 W


Features

- ISO10605(C=330 pF, R=330Ω): ±30kV Air, ±30kV Contact
- HBM ≥ ±8kV & CDM ≥ ±2kV
- ISO7637-2(Note 1) :
 - Pulse 1: $V_S = -150V$
 - Pulse 2a: $V_S = +112V$
 - Pulse 3a: $V_S = -220V$
 - Pulse 3b: $V_S = +150V$
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : Molded plastic, SMB
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.092 grams

SMB

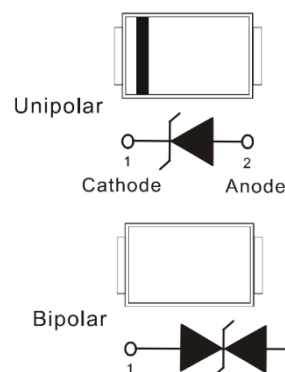

Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Peak Pulse Power Dissipation($t_p=10/1000\mu s$)(Note 2,3)	P_{PP}	600	W
Power Dissipation on Infinite Heat Sink at $T_L=50^\circ\text{C}$	P_D	5	W
Peak Forward Surge Current (8.3ms single half sine-wave)(Note 5)	I_{FSM}	100	A
Peak Pulse Current on $t_p=10/1000\mu s$ Waveform(Note 2,3)	I_{PPM}	See next table	A
ISO10605(C = 330 pF, R = 330 Ω) (Air)	V_{ESD}	±30	kV
ISO10605(C = 330 pF, R = 330 Ω) (Contact)		±30	
Typical Thermal Resistance Junction to Ambient(Note 4)	$R_{\theta JA}$	135	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

NOTES : 1. Not applicable to parts with V_{RWM} lower than battery voltage.

2. Non-repetitive current pulse, per Fig.3 and derated above $T_A=25^\circ\text{C}$ per Fig.2.

3. Mounted on 5mm x 5mm copper pads to each terminal.

4. Mounted on a FR4 PCB, single-sided copper, standard footprint.

5. Unidirectional device only.

6. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.

7. TVS is a transient protection device, it is strongly recommended not to use as a Zener.

P6SMB6.8A-AU ~ P6SMB250CA-AU Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Part Number		V _{RWM}	V _{BR}			I _R @V _{RWM}		V _{C@IPP}		Marking Code	
			Min.	Max.	I _T	μA					
UNI	BI	V	V	V	mA	UNI	BI	V	A	UNI	BI
P6SMB6.8A-AU	P6SMB6.8CA-AU	5.8	6.45	7.14	10	1000	2000	10.5	57	EZB	DZB
P6SMB7.5A-AU	P6SMB7.5CA-AU	6.4	7.13	7.88	10	500	1000	11.3	53	EZD	DZD
P6SMB8.2A-AU	P6SMB8.2CA-AU	7.02	7.79	8.61	10	200	400	12.1	50	EZF	DZF
P6SMB9.1A-AU	P6SMB9.1CA-AU	7.78	8.65	9.5	1	50	100	13.4	45	EZH	DZH
P6SMB10A-AU	P6SMB10CA-AU	8.55	9.5	10.5	1	10	20	14.5	41	EZX	DZX
P6SMB11A-AU	P6SMB11CA-AU	9.4	10.5	11.6	1	5	10	15.6	38	EZM	DZM
P6SMB12A-AU	P6SMB12CA-AU	10.2	11.4	12.6	1	5	5	16.7	36	EZP	DZP
P6SMB13A-AU	P6SMB13CA-AU	11.1	12.4	13.7	1	1	1	18.2	33	EZR	DZR
P6SMB15A-AU	P6SMB15CA-AU	12.8	14.3	15.8	1	1	1	21.2	28	EZT	DZT
P6SMB16A-AU	P6SMB16CA-AU	13.6	15.2	16.8	1	1	1	22.5	27	EZV	DZV
P6SMB18A-AU	P6SMB18CA-AU	15.3	17.1	18.9	1	1	1	25.2	24	EZX	DZX
P6SMB20A-AU	P6SMB20CA-AU	17.1	19	21	1	1	1	27.7	22	EZZ	DZZ
P6SMB22A-AU	P6SMB22CA-AU	18.8	20.9	23.1	1	1	1	30.6	20	EXB	DXB
P6SMB24A-AU	P6SMB24CA-AU	20.5	22.8	25.2	1	1	1	33.2	18	EXD	DXD
P6SMB27A-AU	P6SMB27CA-AU	23.1	25.7	28.4	1	1	1	37.5	16	EXF	DXF
P6SMB30A-AU	P6SMB30CA-AU	25.6	28.5	31.5	1	1	1	41.4	14.4	EXH	DXH
P6SMB33A-AU	P6SMB33CA-AU	28.2	31.4	34.7	1	1	1	45.7	13.2	EXK	DXK
P6SMB36A-AU	P6SMB36CA-AU	30.8	34.2	37.8	1	1	1	49.9	12	EXM	DXM
P6SMB39A-AU	P6SMB39CA-AU	33.3	37.1	41	1	1	1	53.9	11.2	EXP	DXP
P6SMB43A-AU	P6SMB43CA-AU	36.8	40.9	45.2	1	1	1	59.3	10.1	EXR	DXR
P6SMB47A-AU	P6SMB47CA-AU	40.2	44.7	49.4	1	1	1	64.8	9.3	EXT	DXT
P6SMB51A-AU	P6SMB51CA-AU	43.6	48.5	53.6	1	1	1	70.1	8.6	EXV	DXV
P6SMB56A-AU	P6SMB56CA-AU	47.8	53.2	58.8	1	1	1	77	7.8	EXX	DXX
P6SMB62A-AU	P6SMB62CA-AU	53	58.9	65.1	1	1	1	85	7.1	EXZ	DXZ
P6SMB68A-AU	P6SMB68CA-AU	58.1	64.6	71.4	1	1	1	92	6.5	EYB	DYB
P6SMB75A-AU	P6SMB75CA-AU	64.1	71.3	78.8	1	1	1	103	5.8	EYD	DYD
P6SMB82A-AU	P6SMB82CA-AU	70.1	77.9	86.1	1	1	1	113	5.3	EYF	DYF
P6SMB91A-AU	P6SMB91CA-AU	77.8	86.5	95.5	1	1	1	125	4.8	EYH	DYH
P6SMB100A-AU	P6SMB100CA-AU	85.5	95	105	1	1	1	137	4.4	EYK	DYK
P6SMB110A-AU	P6SMB110CA-AU	94	105	116	1	1	1	152	4	EYM	DYM






P6SMB6.8A-AU ~ P6SMB250CA-AU Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Part Number		V _{RWM}	V _{BR}			I _R @V _{RWM}		V _C @I _{PP}		Marking Code	
			Min.	Max.	I _T	uA					
UNI	BI	V	V	V	mA	UNI	BI	V	A	UNI	BI
P6SMB120A-AU	P6SMB120CA-AU	102	114	126	1	1	1	165	3.6	EYP	DYP
P6SMB130A-AU	P6SMB130CA-AU	111	124	137	1	1	1	179	3.3	EYR	DYR
P6SMB150A-AU	P6SMB150CA-AU	128	143	158	1	1	1	207	2.9	YET	DYT
P6SMB160A-AU	P6SMB160CA-AU	136	152	168	1	1	1	219	2.7	EYV	DYV
P6SMB170A-AU	P6SMB170CA-AU	145	162	179	1	1	1	234	2.6	EYX	DYX
P6SMB180A-AU	P6SMB180CA-AU	154	171	189	1	1	1	246	2.4	EYZ	DYZ
P6SMB200A-AU	P6SMB200CA-AU	171	190	210	1	1	1	274	2.2	EWB	DWB
P6SMB220A-AU	P6SMB220CA-AU	185	209	231	1	1	1	328	1.9	EWD	DWD
P6SMB250A-AU	P6SMB250CA-AU	214	237	263	1	1	1	344	1.8	EWE	DWF

P6SMB6.8A-AU ~ P6SMB250CA-AU Series

TYPICAL CHARACTERISTIC CURVES

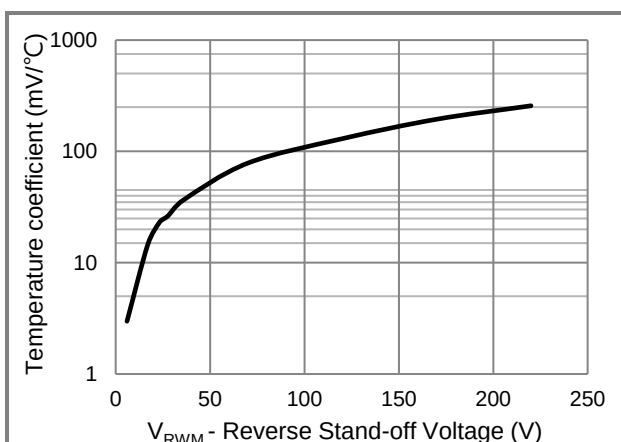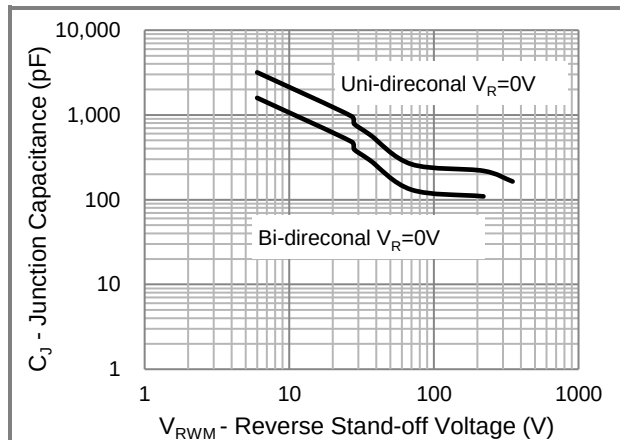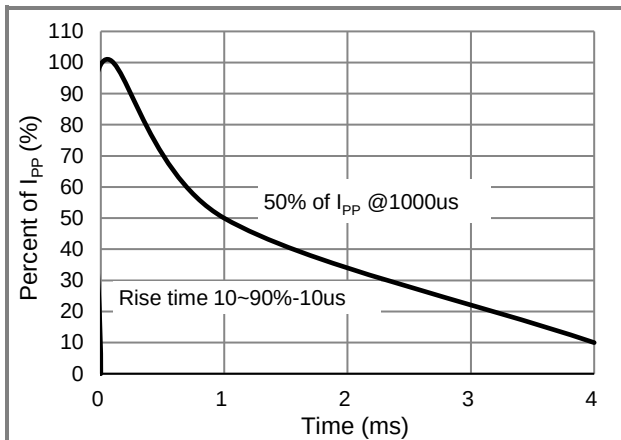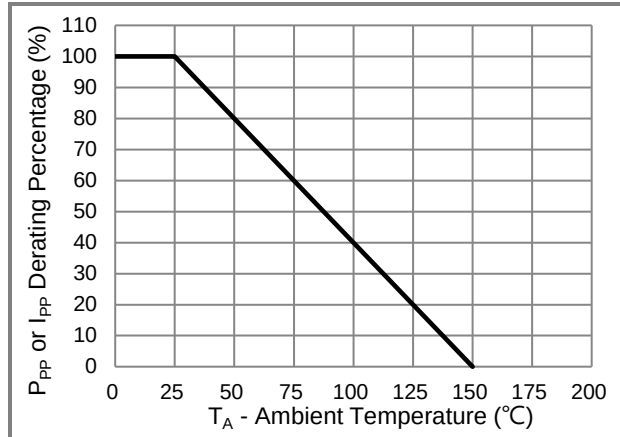
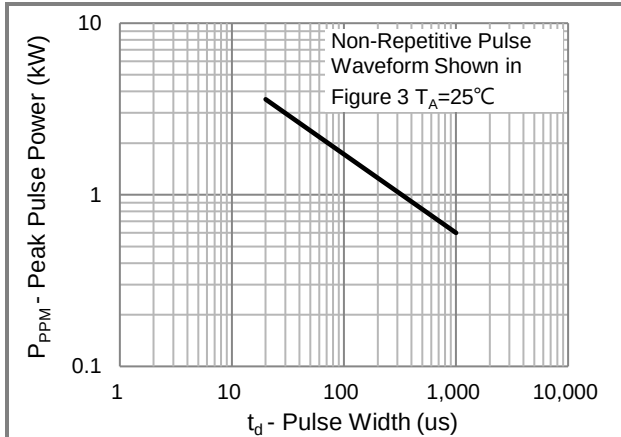


P6SMB6.8A-AU ~ P6SMB250CA-AU Series

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
P6SMBxxxxA-AU	SMB	3K pcs / 13" reel	See Table

Packaging Information & Mounting Pad Layout

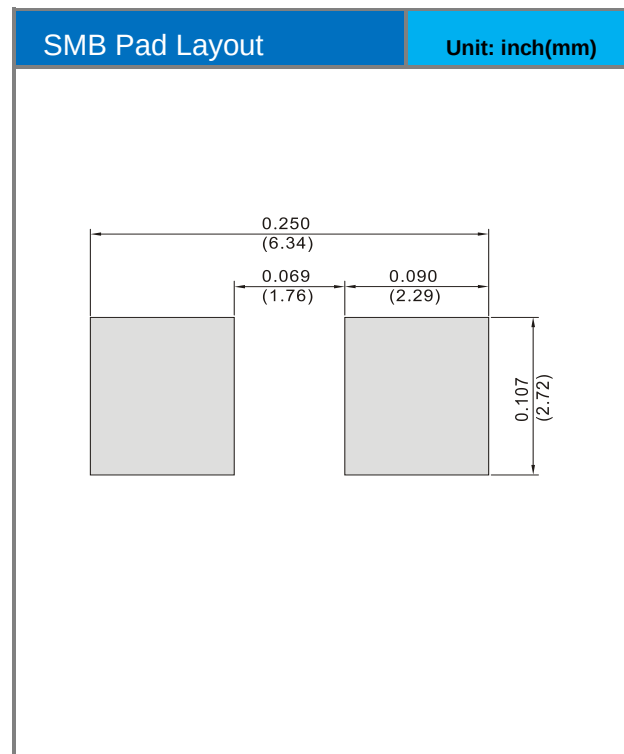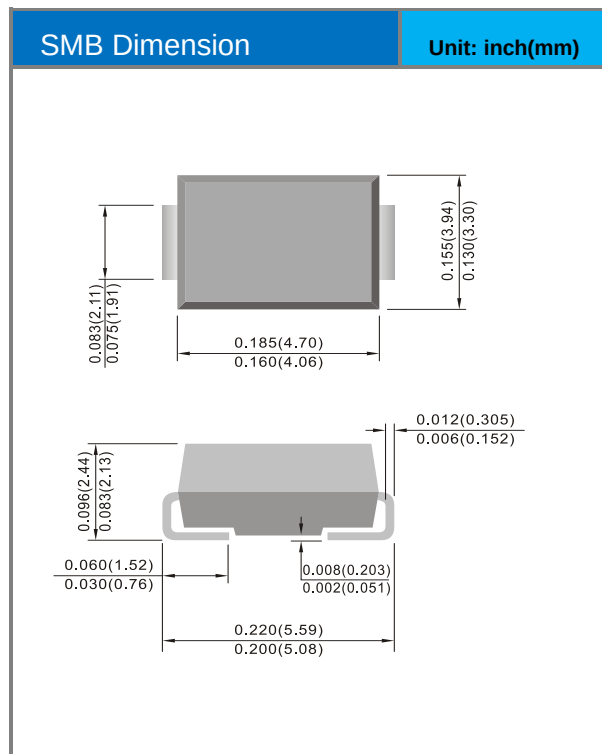

P6SMB6.8A-AU ~ P6SMB250CA-AU Series

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.