

PG1517S

GLASS PASSIVATED JUNCTION PLASTIC RECTIFIER

VOLTAGE 1700 Volt **CURRENT** 1.5 Ampere


DO-41 Unit : inch(mm)

FEATURES

- Plastic package has Underwriters Laboratories Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.
- Lead free in compliance with EU RoHS 2011/65/EU directive

MECHANICAL DATA

- Case: Molded plastic, DO-41
- Terminals: Axial leads, solderable to MIL-STD-750, Method 2026
- Polarity: Color Band denotes cathode end
- Mounting Position: Any
- Weight: 0.0118 ounce, 0.336 gram

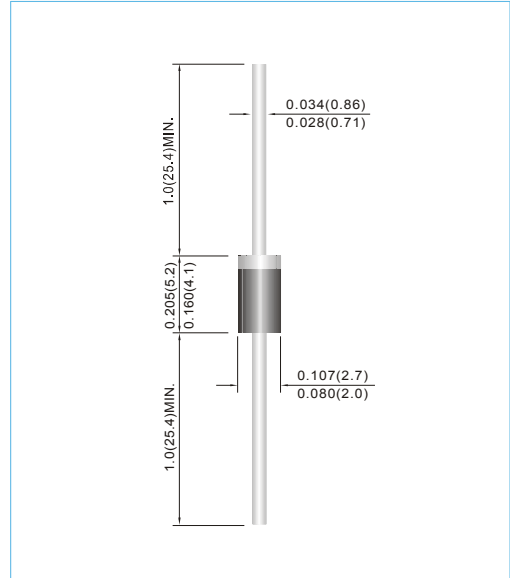

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz, Single phase, half wave, For capacitive load, derate current by 20%

PARAMETER	SYMBOL	VALUE	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1700	V
Maximum RMS Voltage	V_{RMS}	1190	V
Maximum DC Blocking Voltage	V_{DC}	1700	V
Maximum Average Forward Current .375"(9.5mm) lead length	$I_{F(AV)}$	1.5	A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50	A
Rating for Fusing (t<8.3ms)	I^2t	10.375	A ² sec
Maximum Forward Voltage at 1.5A	V_F	2.1	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	1	μA
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	110	°C / W
(Note 2)	$R_{\theta JL}$	43	
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

NOTES: 1. Test without heat sink.

2. Mounted on an FR4 PCB, single-sided copper, with 48cm² copper pad area and valid provided that leads at a distance of 10mm.

PG1517S

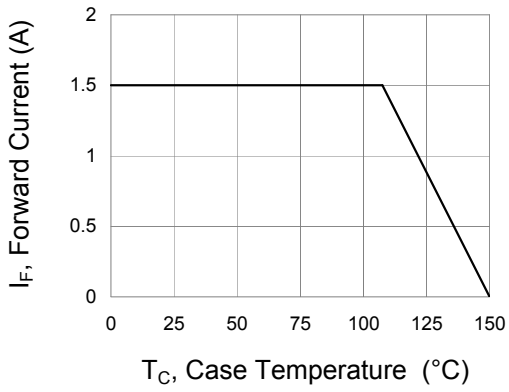


Fig.1 Forward Current Derating Curve

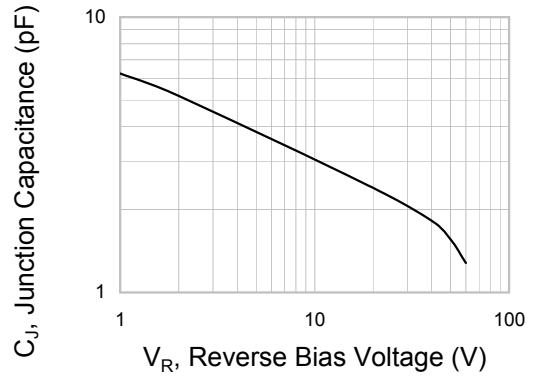


Fig.2 Typical Junction Capacitance

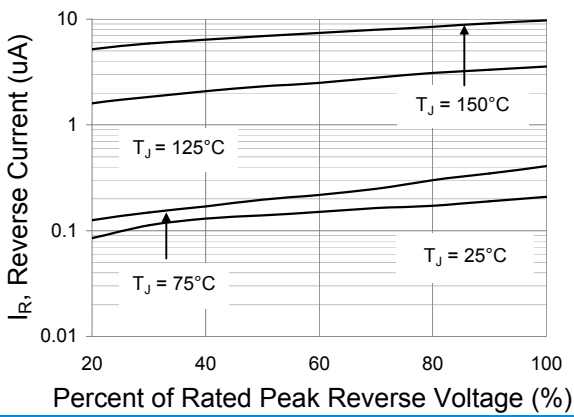


Fig.3 Typical Reverse Characteristics

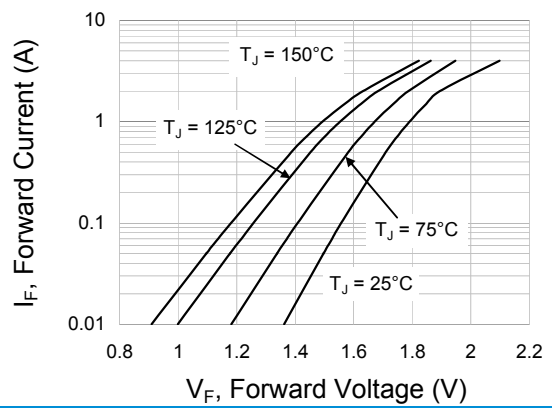


Fig.4 Typical Forward Characteristics

PG1517S

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.