

GENERAL DESCRIPTION

The PJ76324 consists of four independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low-power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, DC gain blocks and all the conventional op amp circuits.

Available Package : SOP-14P and TSSOP-14P.


FEATURES

- ◆ Wide Supply Voltage Range : 3 V to 36 V
- ◆ Low Supply Current Drain essentially Independent of Supply Voltage
- ◆ Low Input Biasing Current
- ◆ Low Input Offset Current and Offset Voltage
- ◆ Input Common-mode Voltage Range includes Ground
- ◆ Differential Input Voltage Range Equal to the Power Supply Voltage
- ◆ DC voltage gain 100 V/mV (Typ.)
- ◆ Internal Frequency Compensation

APPLICATIONS

- ◆ Battery Charger
- ◆ Cordless Telephone
- ◆ Switching Power Supply

PIN CONFIGURATION

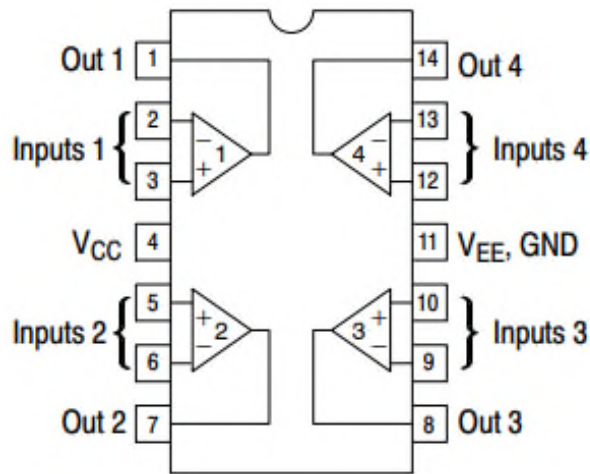

SOP-14P and TSSOP-14P (TOP VIEW)

FUNCTIONAL PIN DESCRIPTION

TERMINAL		DESCRIPTION
NUMBER	NAME	
1	Out 1	Output
2	Input 1-	Inverting Input
3	Input 1+	Non-Inverting Input
4	Vcc	IC Power Supply
5	Input 2+	Non-Inverting Input
6	Input 2-	Inverting Input
7	Out 2	Output
8	Out 3	Output
9	Input 3-	Inverting Input
10	Input 3+	Non-Inverting Input
11	GND	Ground
12	Input 4+	Non-Inverting Input
13	Input 4-	Inverting Input
14	Out 4	Output

ORDERING INFORMATION

ORDER NUMBER	Marking ID	Package	Description
PJ76324P_R2	PJ76324 PYMDNN	SOP-14P	Halogen free RoHS compliant in T/R, 4,000 pcs/Reel
PJ76324B_R2	PJ76324 BYMDNN	TSSOP-14P	Halogen free RoHS compliant in T/R, 4,000 pcs/Reel

Note 1

1. Panjit can meet RoHS 2.0/REACH requirement. So most package types Panjit offers only states halogen free, instead of lead free.

MARKING INFORMATION

Marking ID	Package	Definition
PJ76324 PYMDNN	SOP-14P	PJ76324: Product code P: Package code Y: Year code M: Month code D: Day code NN: Serial No.
PJ76324 BYMDNN	TSSOP-14P	PJ76324: Product code B: Package code Y: Year code M: Month code D: Day code NN: Serial No.

ABSOLUTE MAXIMUM RATINGS

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

PARAMETER		MIN	MAX	Unit
Supply Voltage	V _{CC}	-0.3	36	V
		-18	18	V
Differential Input Voltage	V _{IND}		36	V
Input Voltage	V _{IN}	-0.3	36	V
Input Current (V _{IN} < -0.3 V)	I _{IO}		50	mA
Operating junction temperature range	T _J	-40	125	°C
Maximum Junction Temperature	T _{J(MAX)}		150	°C
Storage temperature range	T _{STG}	-65	150	°C

- (1) Stresses beyond those listed under **absolute maximum ratings** may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under **recommended operating conditions** is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, unless otherwise noted, are with respect to the midpoint between V_{CC+} and V_{CC-}.
- (3) For supply voltages less than ±22 V, the absolute maximum input voltage is equal to the supply voltage.
- (4) Differential voltages are at Input+ with respect to Input-.
- (5) The output may be shorted to ground or either power supply

RECOMMENDED OPERATING CONDITIONS

PARAMETER		MIN	TYP	MAX	UNIT
V _{CC}	Supply Voltage	3		32	V
T _A	Operating Ambient temperature	-40		85	°C

ELECTRICAL CHARACTERISTICS


Test Condition : $V_{CC} = 5.0\text{ V}$, unless otherwise specified, all limits are 100% test at $T_A = 25^\circ\text{C}$. ⁽¹⁾

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{IO}	Input Offset Voltage	$V_{CC} = 5\text{ V to MAX}$, $V_{IC} = V_{ICRMIN}$, $V_O = 1.4\text{ V}$, $T_A = 25^\circ\text{C}$		3	7	mV
		$V_{CC} = 5\text{ V to }30\text{ V}$, $V_{IC} = V_{ICRMIN}$, $V_O = 1.4\text{ V}$, $T_A = -40\text{ to }85^\circ\text{C}$			9	mV
αV_{IO}	Average Temperature Coefficient of Input Offset Voltage	$T_A = -40\text{ to }85^\circ\text{C}$		7		$\mu\text{V}/^\circ\text{C}$
I_{IO}	Input Offset Current	$V_O = 1.4\text{ V}$, $T_A = 25^\circ\text{C}$		2	50	nA
		$V_O = 1.4\text{ V}$, $T_A = -40\text{ to }85^\circ\text{C}$			150	nA
αI_{IO}	Average Temperature Coefficient of Input Offset Current	$T_A = -40\text{ to }85^\circ\text{C}$		10		$\text{pA}/^\circ\text{C}$
I_{IB}	Input Bias Current	$V_O = 1.4\text{ V}$, $T_A = 25^\circ\text{C}$		-20	-250	nA
		$V_O = 1.4\text{ V}$, $T_A = -40\text{ to }85^\circ\text{C}$			-500	nA
V_{ICR}	Common-mode Input Voltage Range ⁽¹⁾	$V_{CC} = 5\text{ V to MAX}$, $T_A = 25^\circ\text{C}$	0		$V_{CC}-1.5$	V
		$T_A = -40\text{ to }85^\circ\text{C}$	0		$V_{CC}-2.0$	V
V_{OH}	High-level Output Voltage	$R_L = 2\text{ k}\Omega$, $T_A = 25^\circ\text{C}$			$V_{CC}-1.5$	V
		$V_{CC} = \text{MAX}$, $R_L = 2\text{ k}\Omega$, $T_A = -40\text{ to }85^\circ\text{C}$	26			V
		$V_{CC} = \text{MAX}$, $R_L = 10\text{ k}\Omega$, $T_A = -40\text{ to }85^\circ\text{C}$	27	28		V
V_{OL}	Low-level Output Voltage	$R_L = 10\text{ k}\Omega$, $T_A = -40\text{ to }85^\circ\text{C}$		5	20	mV
A_{VD}	Large-Signal Differential Voltage Amplification	$V_{CC} = 15\text{V}$, $V_O = 1\text{V to }11\text{V}$, $R_L \geq 2\text{ k}\Omega$, $T_A = 25^\circ\text{C}$	25	100		V/mV
		$V_{CC} = 15\text{V}$, $V_O = 1\text{V to }11\text{V}$, $R_L \geq 2\text{ k}\Omega$, $T_A = -40\text{ to }85^\circ\text{C}$	15			V/mV
CMRR	Common-mode Rejection Ratio	$V_{CC} = 5\text{ V to MAX}$, $V_{IC} = V_{ICR min}$ $T_A = 25^\circ\text{C}$	65	80		dB
k_{SVR}	Supply Voltage Rejection Ratio ($\Delta V_{CC} / \Delta V_{IO}$)	$V_{CC} = 5\text{ V to MAX}$, $T_A = 25^\circ\text{C}$	65	100		dB
V_{O1}/V_{O2}	Crosstalk Attenuation	$f = 1\text{ kHz to }20\text{ kHz}$, $T_A = 25^\circ\text{C}$		120		dB
I_O	Output Current	$V_{CC} = 15\text{ V}$, $V_{ID} = 1\text{ V}$, $V_O = 0\text{ V}$ $T_A = 25^\circ\text{C}$	-20	-30		mA
		$V_{CC} = 15\text{ V}$, $V_{ID} = 1\text{ V}$, $V_O = 0\text{ V}$ $T_A = -40\text{ to }85^\circ\text{C}$	-10			mA

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I _o	Output Current	V _{CC} = 15 V, V _{ID} = 1 V, V _O = 15 V T _A = 25°C	10	20		mA
		V _{CC} = 15 V, V _{ID} = 1 V, V _O = 15 V T _A = -40 to 85°C	5			mA
		V _{ID} = -1 V, V _O = 200 mV	12	30		uA
I _{OS}	Short-Circuit Output Current	V _{CC} at 5V, GND at -5V, V _O = 0 T _A = -40 to 85°C		±40	±60	mA
I _{CC}	Supply Current (Four Amplifiers)	V _O = 2.5 V, No Load T _A = 25 °C		1.1	2.4	mA
		V _{CC} = MAX, V _O = 0.5 V _{CC} , No Load, T _A = -40 to 85°C		1.5	3	mA

(1) All characteristics are measured under open loop conditions with zero common-mode input voltage unless otherwise specified. "MAX" V_{CC} for testing purposes is 30V. Operating temperature: -40 ~ 85°C, MAX Junction temperature: + 150°C.

SCHEMATIC DIAGRAM

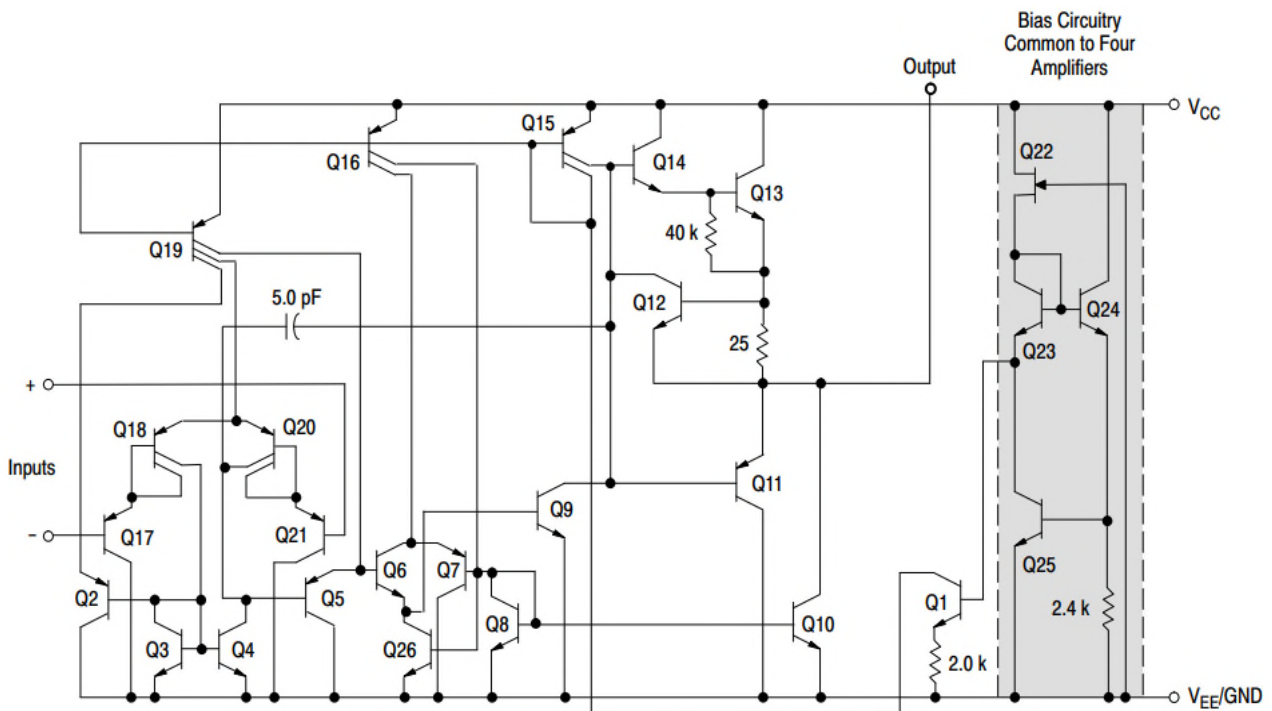

TYPICAL PERFORMANCE CHARACTERISTICS

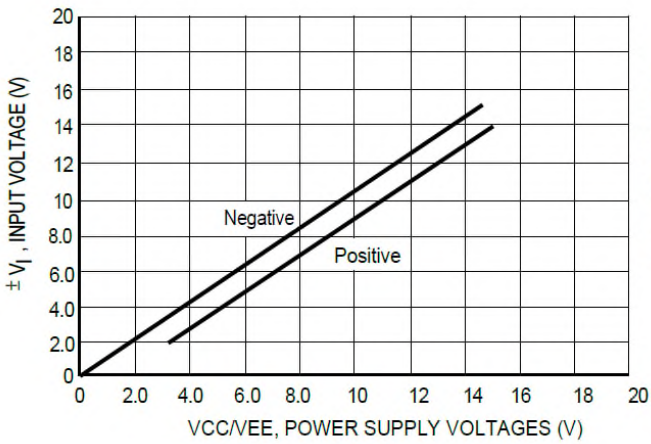


Figure 1. Input Voltage Range

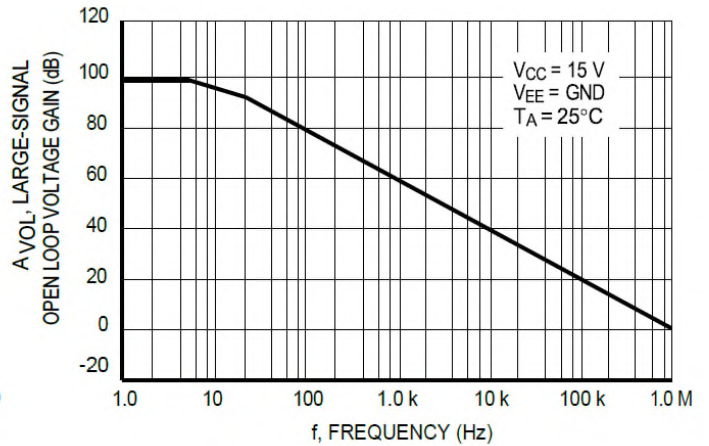


Figure 2. Open Loop Frequency



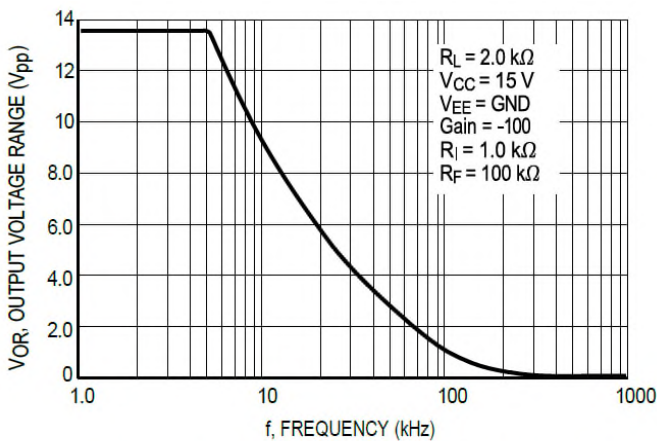



Figure 3. Large-Signal Frequency Response

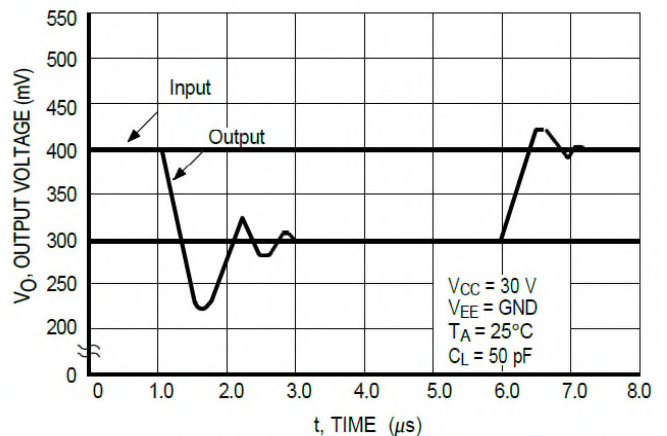

**Figure 4. Small-Signal Voltage Follower
Pulse Response (Noninverting)**

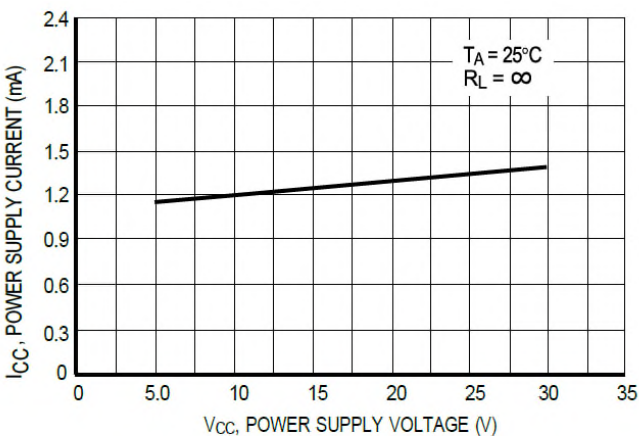




**Figure 5. Power Supply Current versus
Power Supply Voltage**

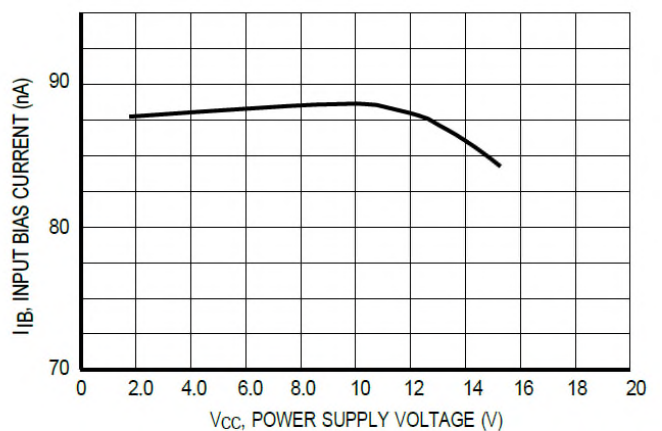

**Figure 6. Input Bias Current versus Power
Power Supply Voltage**

PACKAGE OUTLINE DIMENSION (SOP-14P)


SOP-14P Unit (mm)

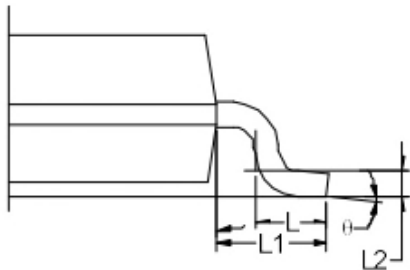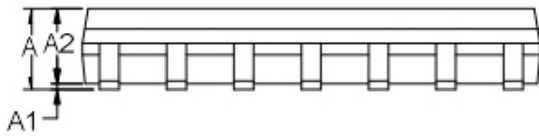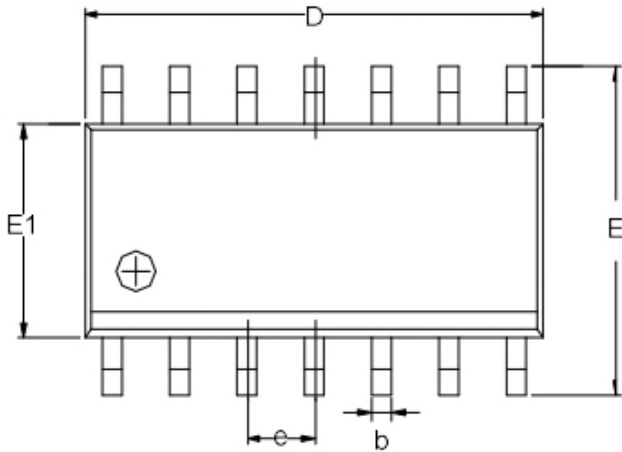

Symbol	Dimensions In Millimeters		
	MIN	TYP	MAX
A	1.35	1.60	1.75
A1	0.10	0.15	0.25
A2	1.25	1.45	1.65
b	0.31		0.51
D	8.45	8.63	8.85
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27 BSC		
L	0.40	0.60	0.80
L1	1.05 REF		
L2	0.25 BSC		
θ	0°		8°

PACKAGE OUTLINE DIMENSION (TSSOP-14P)

TSSOP-14P Unit (mm)

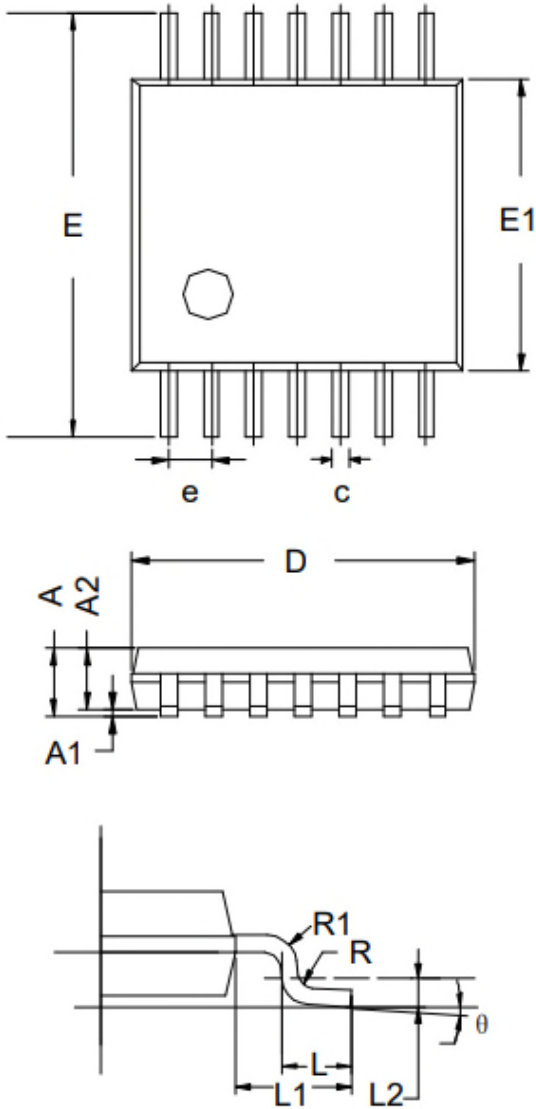

Symbol	Dimensions In Millimeters		
	MIN	TYP	MAX
A	-	-	1.20
A1	0.05	-	0.15
A2	0.80	-	1.05
c	0.19	-	0.30
D	4.86	5.00	5.10
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	0.65 BSC		
L	0.45	0.60	0.75
L1	1.00 REF		
L2	0.25 BSC		
R	0.09	-	-
θ	0°	-	8°

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining