

BAS116TS

Surface Mount, Low Leakage Switching Diodes

VOLTAGE 100 Volt **POWER** 200mWatt


SOD-523

FEATURES

- Surface mount package ideally suited for automatic insertion
- Very low leakage current 2pA typical at VR=75V
- Low capacitance 2pF max at VR=0V, f=1MHz
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

- Case : SOD-523 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx weight : 0.0014 grams



ABSOLUTE RATINGS (each diode)

PARAMETER	Symbol	Value	Units
Reverse Voltage	V_R	85	V
Peak Reverse Voltage	V_{RM}	100	V
Continuous Forward Current	I_F	0.2	A
Non-repetitive Peak Forward Surge Current at t=1.0us	I_{FSM}	4.0	A

THERMAL CHARACTERISTICS

PARAMETER	Symbol	Value	Units
Power Dissipation (Note 1)	P_{TOT}	200	mW
Thermal Resistance, Junction to Ambient (Note 1)	$R_{\theta JA}$	625	°C/W
Junction Temperature	T_J	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C

NOTE :

1. FR-5 Board = 1.0 x 0.75 x 0.062 in.

BAS116TS

ELECTRICAL CHARACTERISTICS (each diode) (TA=25°C, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R = 100 \mu A$	8.5	-	-	V
Reverse Current	I_R	$V_R = 8.5 V$ $V_R = 8.5 V, T_J = 150^\circ C$	-	0.0028	5.80	nA
Forward Voltage	V_F	$I_F = 1 mA$ $I_F = 10 mA$ $I_F = 50 mA$ $I_F = 150 mA$	-	-	0.9 1.0 1.1 1.25	V
Total Capacitance	C_J	$V_R = 0 V, f = 1 MHz$	-	-	2.0	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10 mA, R_L = 100 \Omega$	-	-	3.0	us

CHARACTERISTIC CURVES (each diode)

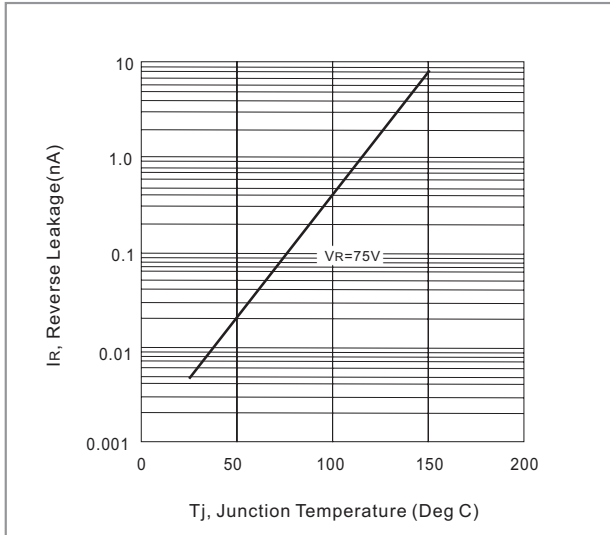


Fig. 1-Reverse Leakage vs. Junction Temperature

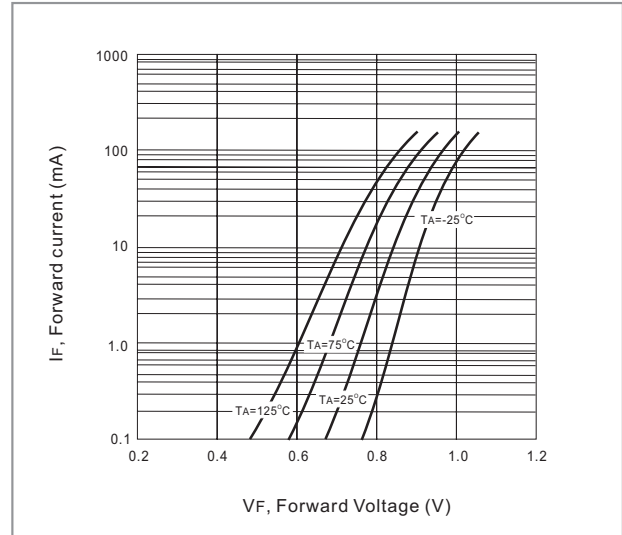


Fig. 2-Forward Current vs. Forward Voltage

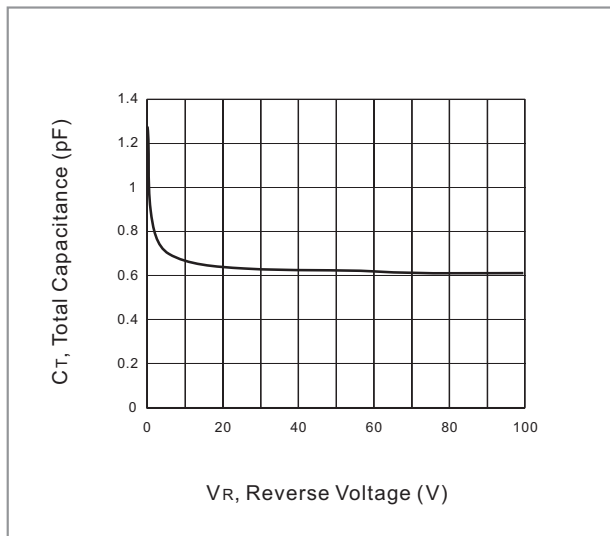




Fig. 3- Total capacitance vs. Reverse Voltage

BAS116TS

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
BAS116TS	SOD-523	5K pcs / 7" reel	PA
BAS116TS	SOD-523	12K pcs / 13" reel	PA

Packaging Information & Mounting Pad Layout

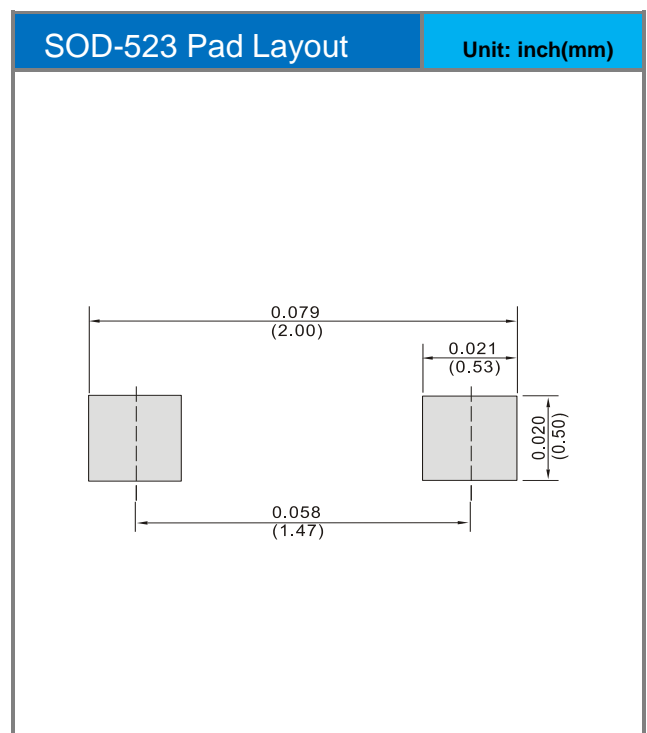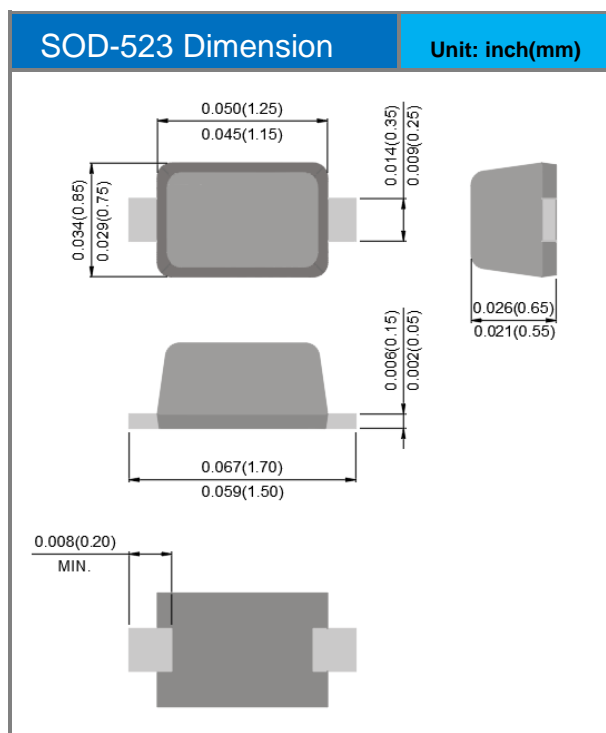

BAS116TS

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.