VOLTAGE

ER1000FCT~ER1006FCT

50 to 600 Volt CURRENT


SUPERFAST RECOVERY RECTIFIERS

| FEATURES |
|---|
| Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound. |

- · Low power loss, high efficiency.
- · Low forward voltge, high current capability
- · High surge capacity.
- · Super fast recovery times, high voltage.
- · Lead free in compliance with EU RoHS 2.0
- · Green molding compound as per IEC 61249 standard

MECHANICAL DATA

- · Case: ITO-220AB Molded plastic
- Terminals: Lead solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- · Standard packaging: Any
- · Weight: 0.056 ounces, 1.6 grams.

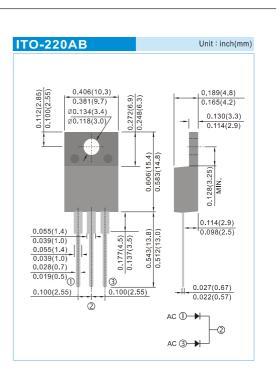

MAXIMUM RATING AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

10 Ampere

| PARAMETER | SYMBOL | ER1000FCT | ER1001FCT | ER1001AFCT | ER1002FCT | ER1003FCT | ER1004FCT | ER1006FCT | UNITS |
|---|----------------------------------|--------------|-----------|------------|-----------|-----------|-----------|-----------|-----------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 150 | 200 | 300 | 400 | 600 | v |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 105 | 140 | 210 | 280 | 420 | V |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 150 | 200 | 300 | 400 | 600 | v |
| Maximum Average Forward Current at T _c =100°C | I _{F(AV)} | 10 | | | | | | | А |
| Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load | I _{fsm} | 150 | | | | | | | А |
| Maximum Forward Voltage at 5A, per element | V _F | 0.95 1.3 1.7 | | | | | | V | |
| Maximum DC Reverse Current at Rated DC Blocking $T_j=25^{\circ}C$ Voltage $T_j=100^{\circ}C$ | I _R | 1 500 | | | | | | | μA |
| Maximum Reverse Recovery Time (Note 2) | t _{rr} | 35 | | | | | | | ns |
| Typical Junction Capacitance (Note 1) | C | 62 | | | | | | | рF |
| Typical Thermal Resistance | R _{ejc} | 3 | | | | | | | °C / W |
| Operating Junction and Storage Temperature Range | T _j ,T _{stg} | -55 to +150 | | | | | | | °C |

NOTES


- 1. Measured at 1 MHz and applied reverse voltage of 4 VDC.
- 2. Reverse Recovery Test Conditions: I_F =0.5A, I_R =1A, Irr=0.25A.

3. Both Bonding and Chip structure are available.



ER1000FCT~ER1006FCT

RATING AND CHARACTERISTIC CURVES

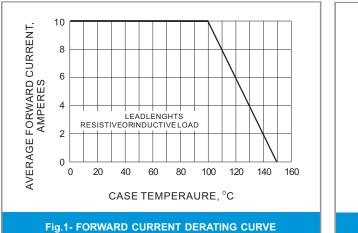

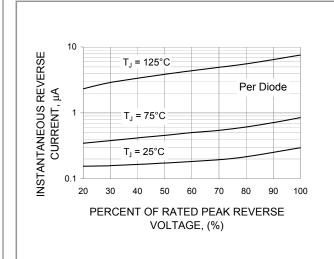


Fig.3- TYPICAL REVERSE CHARACTERISTIC

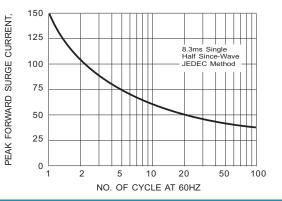


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT


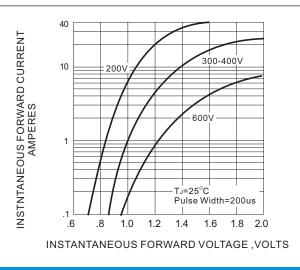


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC





(PBCD)

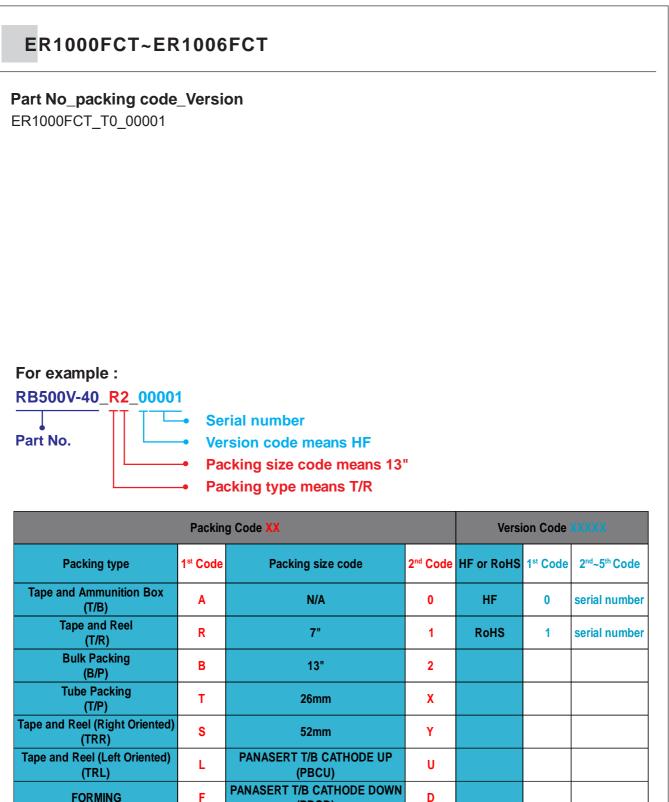

ER1000FCT~ER1006FCT

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.