

PBHV8050SA

Silicon NPN Triple Diffuse High Voltage Transistor

Voltage

500V

Current

150mA

Features


- Silicon NPN Triple diffuse type
- Excellent DC current gain characteristics
- Low Saturation Voltage
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: SOT-23 Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0084grams

SOT-23

Unit: inch(mm)

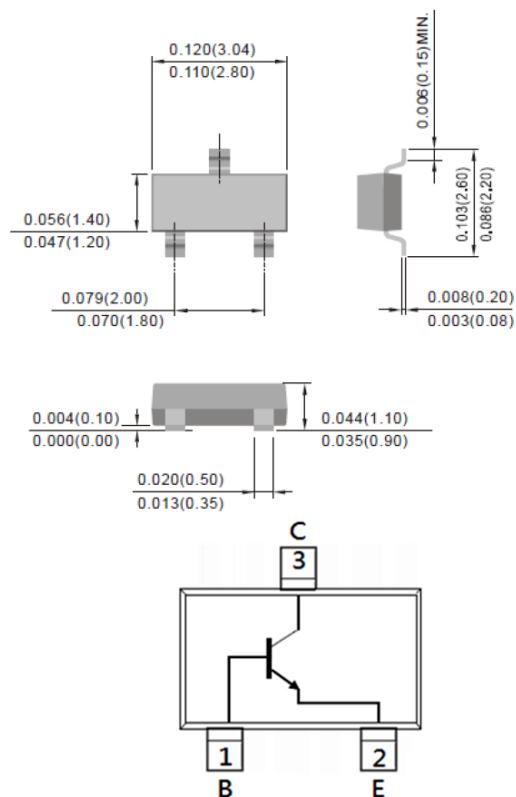

Maximum Ratings and Thermal Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-Base Voltage	V _{CBO}	500	V
Collector-Emitter Voltage	V _{CEO}	500	V
Emitter-Base Voltage	V _{EBO}	5	V
Collector Current (DC)	I _C	150	mA
Collector Current (Pulse)	I _{CP}	500	mA
Total Power Dissipation	P _{TOTAL}	0.5	W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55~150	°C
Typical Thermal Resistance from Junction to Ambient ^(Note)	R _{θJA}	250	°C/W

Note : Mounted on a 1 inch FR-4 with 2oz. square pad of copper.

PBHV8050SA

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
OFF Characteristics						
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=10\text{mA}$, $I_B=0\text{A}$	500	-	-	V
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=0.1\text{mA}$, $I_E=0\text{A}$	500	-	-	V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E=0.1\text{mA}$, $I_C=0\text{A}$	5	-	-	V
Collector-Base Cutoff Current	I_{CBO}	$V_{CB}=500\text{V}$, $I_E=0\text{A}$	-	-	100	nA
Emitter-Base Cutoff Current	I_{EBO}	$V_{EB}=5\text{V}$	-	-	100	nA
Collector-Emitter Cutoff Current	I_{CES}	$V_{CES}=500\text{V}$	-	-	100	nA
ON characteristics						
DC Current Gain	h_{FE}	$V_{CE}=10\text{V}$ $I_C=1\text{mA}$	150	-	300	-
		$V_{CE}=10\text{V}$ $I_C=50\text{mA}$	80	-	300	
		$V_{CE}=10\text{V}$ $I_C=100\text{mA}$	-	15	-	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=20\text{mA}$, $I_B=2\text{mA}$	-	-	0.2	V
		$I_C=50\text{mA}$, $I_B=10\text{mA}$	-	-	0.5	
Base-Emitter Saturation voltage	$V_{BE(SAT)}$	$I_C=50\text{mA}$, $I_B=10\text{mA}$	-	-	0.9	V
Base-Emitter Turn-on voltage	$V_{BE(on)}$	$I_C=50\text{mA}$, $V_{CE}=10\text{V}$	-	-	0.9	
Transition Frequency	f_T	$I_C=-10\text{mA}$, $V_{CE}=20\text{V}$	-	50	-	MHz
Collector Output Capacitance	C_{OB}	$V_{CB}=20\text{V}$, $f=1\text{MHz}$	-	-	8	pF
Turn On Time	t_{ON}	$V_{CE}=100\text{V}$, $I_C=50\text{mA}$	-	110	-	nS
Turn Off Time	t_{OFF}	$I_{B1}=5\text{mA}$, $I_{B2}=-10\text{mA}$	-	1500	-	nS

PBHV8050SA

TYPICAL CHARACTERISTIC CURVES

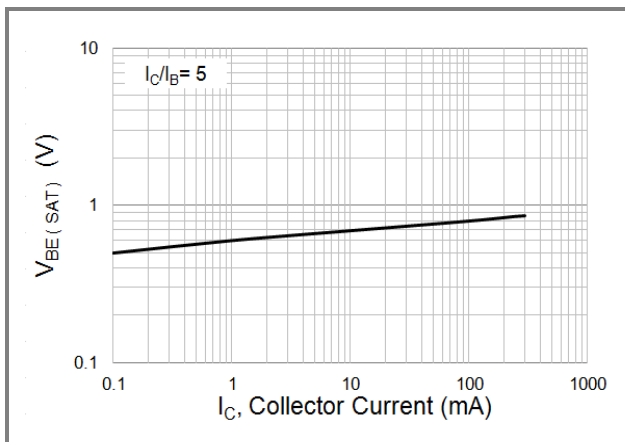


Fig.1 Typical Base-Emitter Saturation Voltage

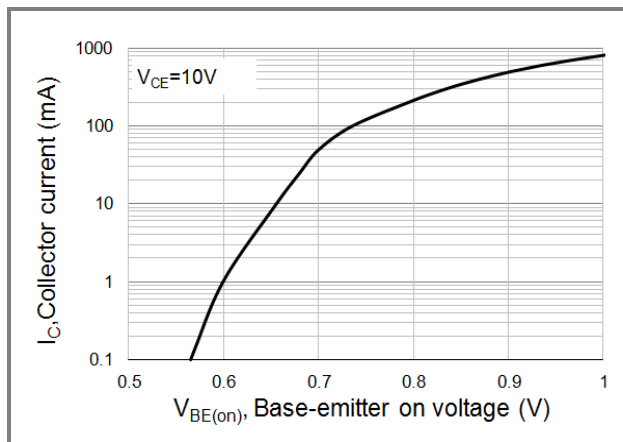


Fig.2 Typical Base-Emitter Turn-on Voltage

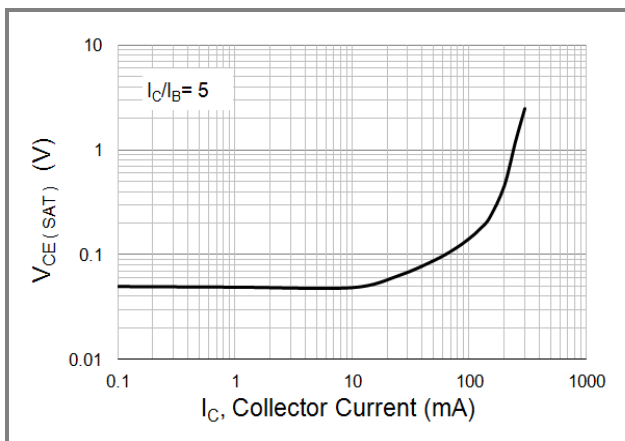


Fig.3 Typical Collector-Emitter Saturation

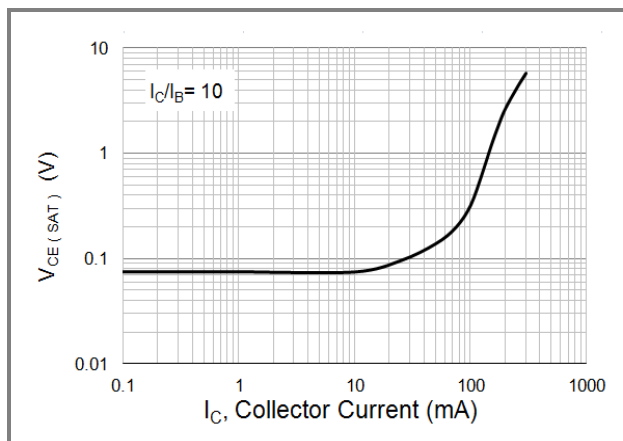


Fig.4 Typical Collector-Emitter Saturation

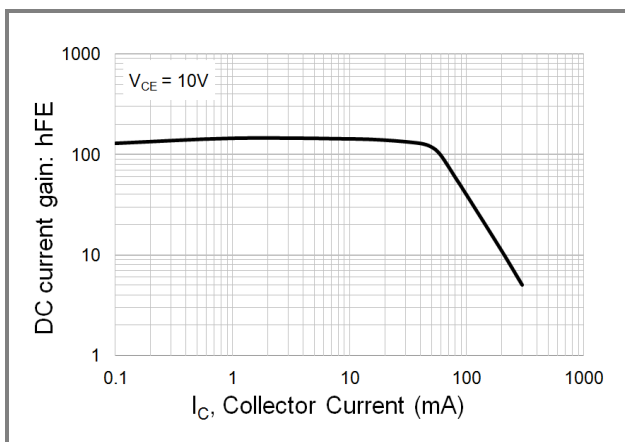


Fig.5 Typical DC Current Gain vs Collector Current

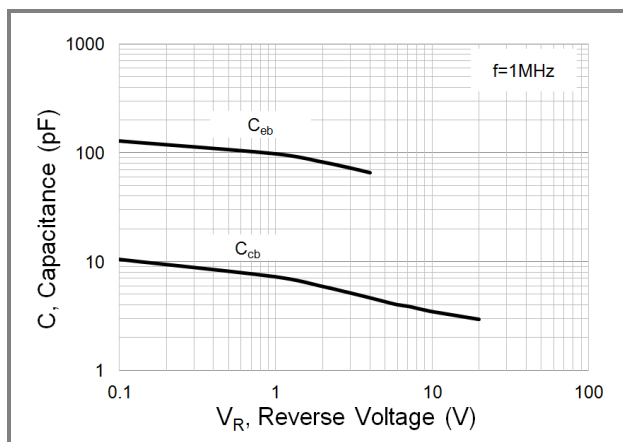



Fig.6 Typical Capacitance

PBHV8050SA

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PBHV8050SA	SOT-23	3K pcs / 7" reel	805

Mounting Pad Layout

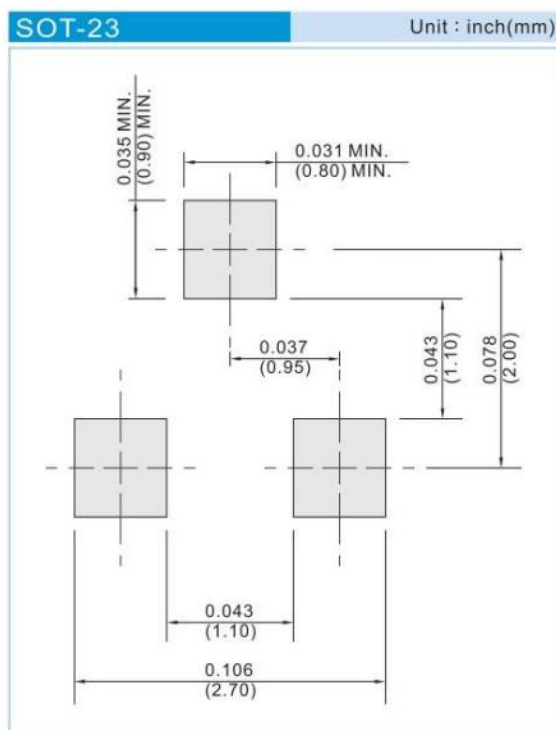

PBHV8050SA

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.